


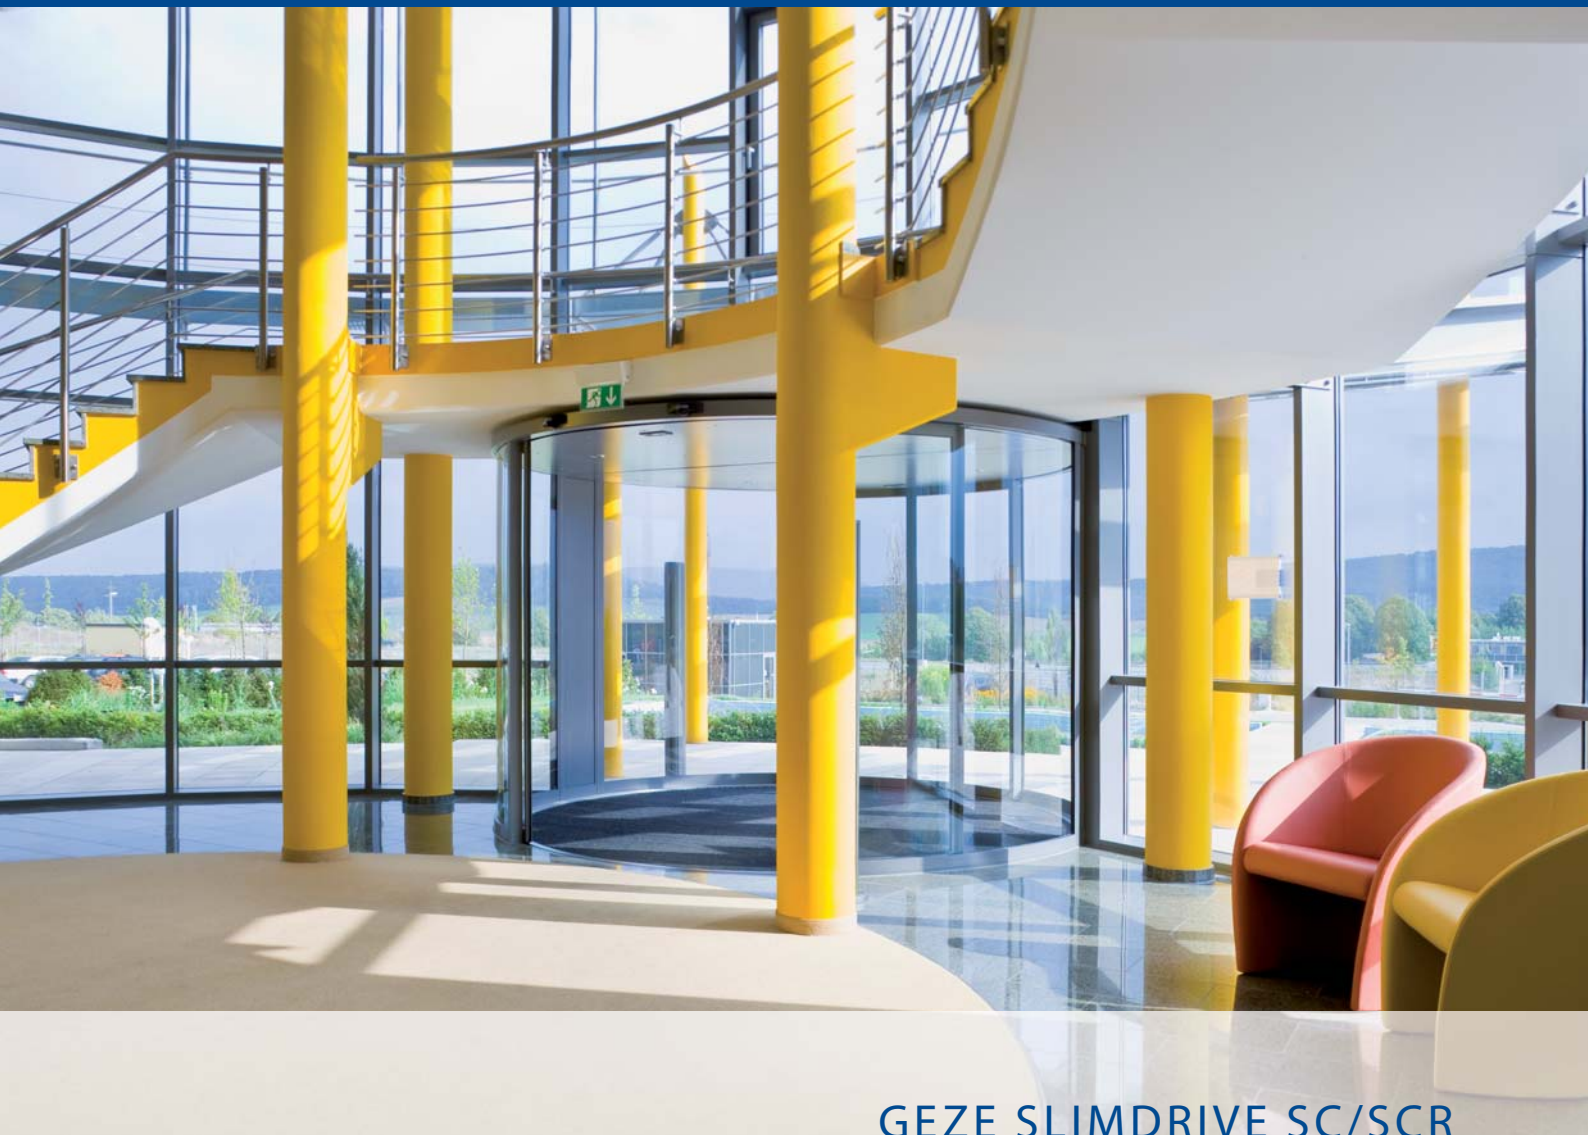

GEZE SLIMDRIVE SC/SCR
AUTOMATIC SEMI-CIRCULAR AND
CIRCULAR SLIDING DOORS



TABLE OF CONTENTS

Introduction. 7 cm – A nice round figure	4
Product benefits	5
Application areas	6
Dimensions and system description	7
Technical details	8
Product features	9
Drawings showing SC system dimensions	10
Variants	11
Operating modes	14
Drawings: Drive, drive rail and side parts	15
Drawings: Horizontal and vertical sections	16
Drawings: Hot-air curtains	19
Drawings: Floor ring	20
Drawings: Facade connections	21
Wiring diagram	23
Protecting the transit area	24
Slimdrive SC/SC-FR WK2	25
Certificate of the ift Rosenheim	28
References	29



Belgian SkyShops, Brussels International Airport • GEZE Slimdrive SC automatic semi-circular sliding door with a drive height of just 7 cm

INTRODUCTION

7 cm – A nice round figure

The entrance area is your building's ambassador. Automatic semi-circular and circular sliding doors serve a purpose in terms of both function and design – so by making them an eye-catching part of your facade, you can transform your entrance area into something that really makes a statement. Even where overall dimensions are narrow, they create ample space for the passage of traffic. With our diverse range of options, we can offer the right solution for every building, whatever the requirements of the entrance area. Door systems can have a convex or concave shape and may be integrated into the building in a huge variety of ways, enabling us to implement virtually any technical solution possible. Two curved sliding doors can even be combined to create an aesthetically pleasing circular configuration. This kind of design can be positioned either centrally or off-centre in the facade.

GEZE door systems create more space and light. Incorporating an optional glass roof is a way of even further emphasising an inviting atmosphere. Standing at just seven centimetres in height, the drive features the same narrow post and rail structure as is used for glass facades. The moving leaves and side parts are fine-framed and add to the visual impression of light and transparency.

These types of applications rarely use conventional doors, so that's why we're equipped with all the resources needed to meet all your wishes and requirements. We can bring solutions with any dimensions and passage heights to fruition, and produce every door system to satisfy individual needs. Our extensive range means you're sure to find exactly the right colours, surfaces and configuration for your building.

PRODUCT BENEFITS

The best solution for escape and rescue routes

Our semi-circular and circular sliding doors are TÜV type-tested and meet the requirements of the German guidelines on automatic sliding doors in escape routes (AutSchR) and on power-operated windows, doors and gates (BGR 232). Redundant control and drive technology, as well as special actuation devices, ensure the safety of escape and rescue routes, and all relevant safety functions are monitored. The drive control system ensures that the door's automatic opening function continues to work even in the event of a fault or power failure. All GEZE semi-circular and circular sliding doors are type-tested and certified in accordance with DIN 18650.

All the benefits at a glance

- Individual planning and production services for every building
- Each variant is TÜV type-tested in accordance with DIN 18650
- The extremely low drive height allows for large passage heights and conveys a sense of high-class elegance. The vast amount of light falling into the building creates light, pleasant entrance and emphasises a sense of transparency in the building's aesthetics.
- The variant featuring a glass roof further emphasises this transparency.
- High-quality materials and cutting-edge control technology ensure maximum performance in your entrance area.
- Semicircular and circular sliding doors create an opening width of up to 40% more as compared with linear sliding doors.
- Ideally suited to glass facades featuring a narrow post and rail structure
- The central suspension system for the moving leaves ensures extremely quiet sliding motion and a long service life.
- FR variant also available for use in escape and rescue routes (in accordance with German AutSchR)
- Easy to operate and set thanks to proven sliding door technology



DIN 18650





Inometa, Herford, Germany • GEZE Slimdrive SCR automatic circular sliding door



GEZE SLIMDRIVE SC/SCR

APPLICATION AREAS

- High-status business premises
- Hotels and restaurants
- Hospitals
- Residential and care homes
- Airports and railway stations
- Trade fairs, exhibitions and car dealerships
- Draught proof systems
- Suitable for new buildings and conversion/renovation projects thanks to low height



Miele Museum, Gütersloh, Germany
Oval-shaped GEZE Slimdrive SCR-FR circular sliding door with suspended hot-air curtains



Steff Museum, Giengen, Germany
GEZE Slimdrive SC single-leaf semi-circular sliding door

DIMENSIONS

- Drive height of just 7 cm
- Option of single and double-leaf variants
- Max. leaf weight 120 kg, (single-leaf: 100 kg)
- Linear opening width:
 - Max. 1900 mm with a clear height up to 2500 mm
 - Max. 2300 mm with a clear height up to 2300 mm
 - We will be happy to create solutions with different dimensions on request.
- Clear passage height: 3000 mm, higher if required

SYSTEM DESCRIPTION

- Door profiles and track made of aluminium or covered
- Continuous floor guide made from stainless steel
- System design may be convex (running on inside) or concave (running on outside)
- Side and top connections to concrete, brickwork, steel constructions, glass constructions and post and rail constructions can be released individually.
- Large variety of surface variants
- The system and moving leaves may be fine-framed with GEZE profile systems or fitted with the GEZE GGS fitting system.
- A variety of configuration variants is available for side parts and ceilings.

Maximum-quality door design

Slimdrive SC-GGS variant – elegance and transparency without borders

The simple and functional shape of this stainless steel fitting opens up a wide variety of individual possible applications – as do the options of how it can be combined with curved sliding doors. By incorporating the GGS fitting system (GEZE all-glass systems), curved sliding doors will leave a great impression of perfect design. The variant featuring a glass roof maximises the sense of transparency. Each of the moving leaves is attached to the roller carriage using two point supports and can also be designed without a frame. Point supports are also used to fasten the floor guide to the glass. The side parts are made from curved, laminated safety glass and fitted with extremely slim profiles for protecting edges. The SC-GGS variant can also have a circular sliding door configuration through the combination of two semi-circular sliding doors. The minimum radius is 1250 mm, while the maximum clear passage is 2500 mm and the maximum leaf weight 100 kg. However, we can also create solutions with larger or smaller dimensions on request. The FR version is available for use in escape and rescue routes.





TECHNICAL DETAILS

Design of FR variant for use in escape and rescue routes

- Single fault-safe thanks to 2-motor technology/battery (SC-FR and SCR-FR) in conjunction with a redundant controller
- Lockable programme switch
The programme switch may only be operated by authorised persons, meaning that a key-operated switch is absolutely essential. The selected operating mode must be clearly recognisable.
- Self-monitoring movement detector (redundancy):
The detector function must be continuously monitored. The door opens if a fault is detected (maintenance required).
- Notes on locking escape and rescue route doors ("Night" operating mode):
Automatic sliding doors for use in escape and rescue routes must be locked, provided that the sliding door is not subject to any escape and rescue route requirements during this particular period of time. This is usually the case if there are no persons in the building or if another escape route has been specified for them.

Description of control with functions

- Fully digital control with high-performance microprocessor
- All system settings can be made and functional, fault and maintenance parameters displayed by means of GEZE display programme switches
- Operating modes: Automatic, permanent hold-open, shop closing time (one-way), night
- Infinitely adjustable reduced opening width in teach-in mode, with the minimum escape route width taken into consideration for the FR variant: this is dependent on the number of persons who are to use this exit and is at least one metre for five or more persons.
- Different hold-open times for summer operation, winter operation and key activation
- Statistical data and errors displayed via programme switch (number of opening movements, service interval display)
- Self-teaching door controller
- Stay-open time automatically adapts to volume of traffic (can be activated)
- Connection to fire alarm system
- Electromechanical locking mechanism with optional status contact for alarm systems
- Individually adjustable opening and closing speed
- Error display for safety sensor and radar movement detector
- Controls with special function available on request



Sparkasse Minden-Lübbecke, Hille, Germany
GEZE Slimdrive SCR circular sliding door with glass roof and raised ceiling dome

	Slimdrive SC semi-circular sliding door	Slimdrive SCR circular sliding door
Dimensions		
Opening width (2-leaf)	800 - 3000 mm	800 - 2300 mm
Radius	1000 mm - infinite	1000 - 1800 mm
Clear height	3000 mm Higher on request	3000 mm Higher on request
Leaf weight (2-leaf)	max. 120 kg	max. 120 kg
Leaf weight (1-leaf)	max. 100 kg	max. 100 kg
Dome height	from 70 mm	from 70 mm
Moving leaf		
Standard	Laminated safety glass, 10 mm, fine-framed	Laminated safety glass, 10 mm, fine-framed
GGs variant	Toughened safety glass (H), 10 mm, with GGS fitting system	Toughened safety glass (H), 10 mm, with GGS fitting system
	Special glass types available on request	Special glass types available on request
Side parts		
Standard	Laminated safety glass, 10 mm, fine-framed	Laminated safety glass, 10 mm, fine-framed
	Panel filling, 22 mm	Panel filling, 22 mm
	Straight panels, 34 mm	Straight panels, 34 mm
GGs variant	Laminated safety glass, 12 mm, without frame	Laminated safety glass, 12 mm, without frame
	Special glass types available on request	Special glass types available on request
Surfaces		
	RAL powder coating	RAL powder coating
	Anodised light metal (E6/EV1)	Anodised light metal (E6/EV1)
	Colour anodising acc. to sample	Colour anodising acc. to sample
	Anodised finish similar to stainless steel	Anodised finish similar to stainless steel
	Covered with polished stainless steel	Covered with polished stainless steel
	Covered with stainless steel, grain 240	Covered with stainless steel, grain 240
	Special coatings available on request	Special coatings available on request
Roof structure		
	Drive cover as optical sheet metal casing	Drive cover as optical sheet metal casing
	Waterproof with 2 spouts (exterior)	Waterproof with 2 spouts (exterior)
	Glass roof with plate surround for drive unit	Glass roof with plate surround for drive unit
Fitting options		
Lighting	For variant with roof (not possible with glass roof)	For variant with roof (not possible with glass roof)
Floor covering	Strip mat Acc. to customer requirements	Strip mat Acc. to customer requirements
Off-centre facade connection	Not possible	Possible
Hot-air curtain system	Possible depending on ceiling structure	Integrated into suspended ceiling with dome height of just 7 cm
Special functions	On request	On request

GEZE SLIMDRIVE SC/SCR

Semi-circular and circular design

Nominal radius (mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
System angle	180°	180°	180°	180°	180°	180°	180°	180°	180°	180°	180°
Passage angle	80°	80°	80°	80°	80°	80°	80°	80°	80°	80°	80°
System width (mm)	2000	2200	2400	2600	2800	3000	3200	3400	3600	3800	4000
Clear passage width (mm)	1144	1273	1401	1530	1658	1787	1916	2044	2173	On request	On request
Curve length (mm)	3142	3456	3770	4084	4398	4712	5027	5341	5655	5969	6283

Standard dimensions

Curve length (BL) = max. 5500 mm

Passage width (LW) = 1000 mm – 2300 mm

Approximate calculation of curve length (BL)


- With specified radius (r) and angle (y)

$$BL = r \cdot \frac{y \cdot \pi}{180}$$

- With specified depth (T) and system width (B)

$$BL = \sqrt{B^2 + \frac{16}{3} \cdot T^2}$$




VERTICAL SECTION

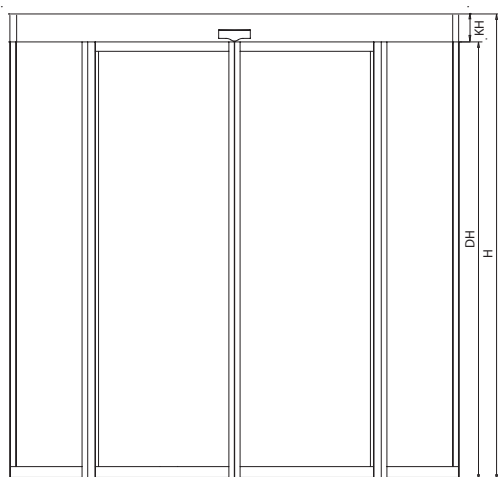

Abbreviations

LW	Passage width
r	Nominal radius
S	Inner width
B	System width
KH	Dome height
H	System height
DH	Passage height

HORIZONTAL SECTIONS

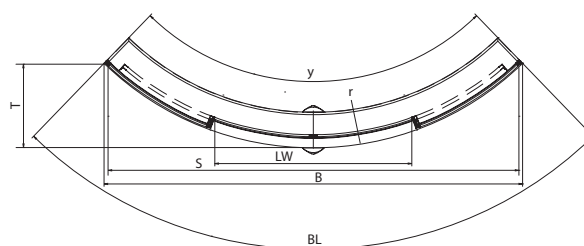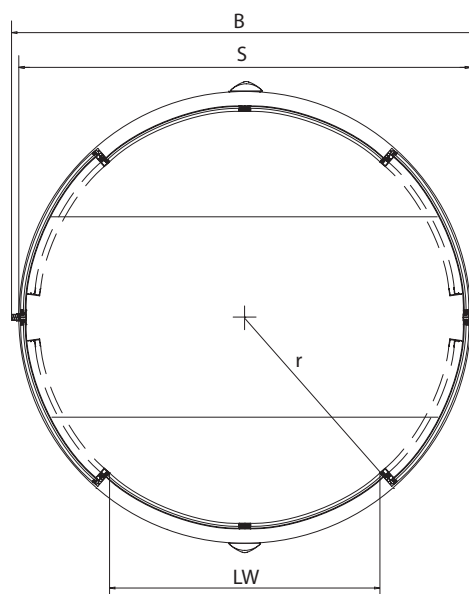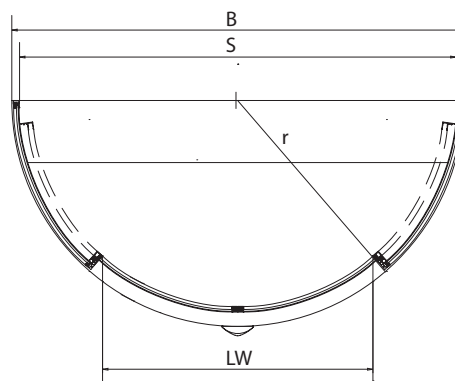


**SLIMDRIVE SC
 SEMI-CIRCULAR
 SLIDING DOOR**

Basic shape


Slimdrive SC semi-circular sliding door

Double-leaf or multiple-leaf semi-circular sliding door, in any combination




Special variants


- Curves running together

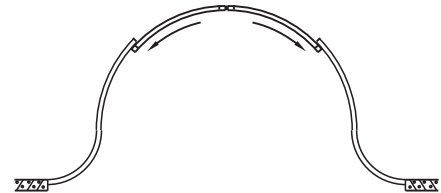

- Lengthened semicircular configuration



Jewel of the Seas

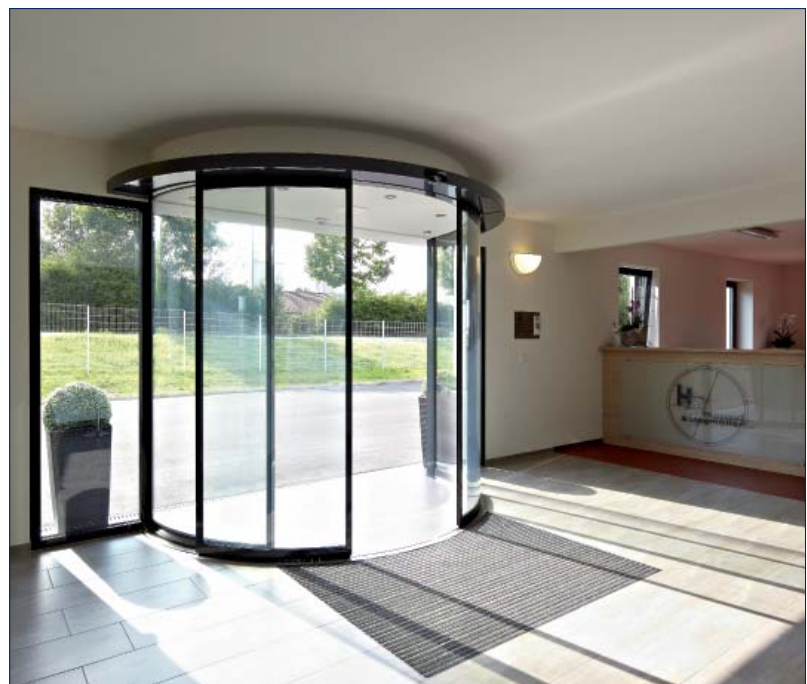


Hippauf & Stegmüller, Arnstorf, Germany

GEZE SLIMDRIVE SC/SCR


SLIMDRIVE SC SEMI-CIRCULAR SLIDING DOOR

Special variants


- 180° draught lobby
Double-leaf semi-circular sliding door combined with linear sliding door




- 90° corner door
Maximum opening width with optimum use of space



- 270° corner door
Double-leaf, centrally opening, or each single leaf opening outward



- Double entrance
For separate entrances and exits



Museum of Textile and Industry, Augsburg, Germany




Lexus car dealership, Riga, Latvia

**SLIMDRIVE SCR
CIRCULAR SLIDING DOOR**

Basic shape


Slimdrive SCR circular sliding door

- 360° draught lobby
- Two double-leaf semi-circular sliding doors, each 180° with separate drives




Special variants

- Pre-manufactured as oval, draught lobby



- Enlarged draught lobby



Four Elements, Düsseldorf, Germany



Lufthansa, Köln, Germany

GEZE SLIMDRIVE SC/SCR



You can set the following operating modes using the programme switch:

Permanent hold-open operating mode

The door moves to the OPEN position and remains open. Movement detectors and opening buttons are deactivated.

Night operating mode

The movement sensors are switched to an inactive state and the door closes.

As an option, the door leaves can be locked electrically to prevent them from being forced open.

Shop closing time (one way) operating mode

The door opens and only closes if someone is going from the inside to the outside. The external movement detector is inactive and the internal one is switched to active.

Automatic operating mode



The door opens as soon as movement detectors or buttons are activated, and closes again after an adjust-able period of time. A safety sensor system safeguards the movement path of the leaves. The door will not close if a person is in the opening.

Reduced opening width operating mode

Activate or deactivate the settings made in teach-in mode


Key-operated switch

The programme switch can be disabled using a key-operated switch (required for FR variants).



Fort Dunlop, Birmingham, UK
GEZE Slimdrive SCR circular sliding door with integrated hot-air curtain system in raised ceiling dome


DRIVE

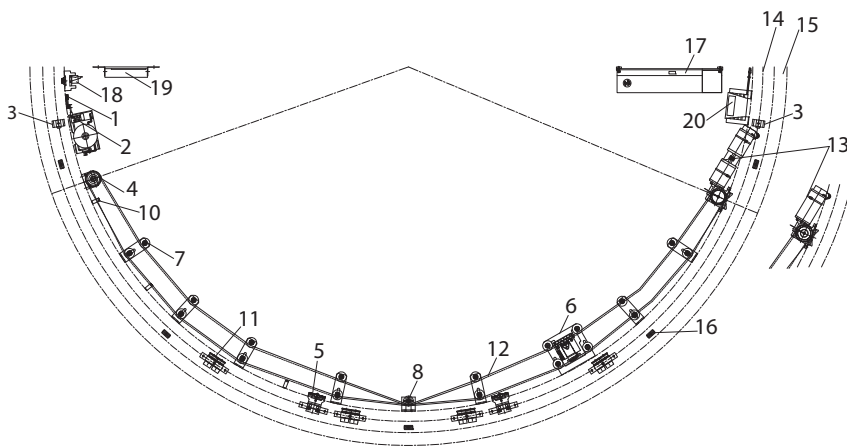

Key:

- 1 Earthing connection
- 2 Transformer
- 3 Buffer
- 4 Deflection pulley
- 5 Carrier (long)
- 6 Toothed belt locking mechanism
- 7 Roller holder
- 8 Tandem deflection pulley
- 9 Close safety sensor (SIS)
- 10 Cable holder
- 11 Roller holder
- 12 Toothed belt
- 13 DCU1/DCU1-2M drive motor
- 14 Track
- 15 Girder profile
- 16 Clamping sliding blocks
- 17 Control
- 18 Relay for SIS
- 19 Control unit for SIS
- 20 Battery


DRIVE RAIL AND SIDE PARTS

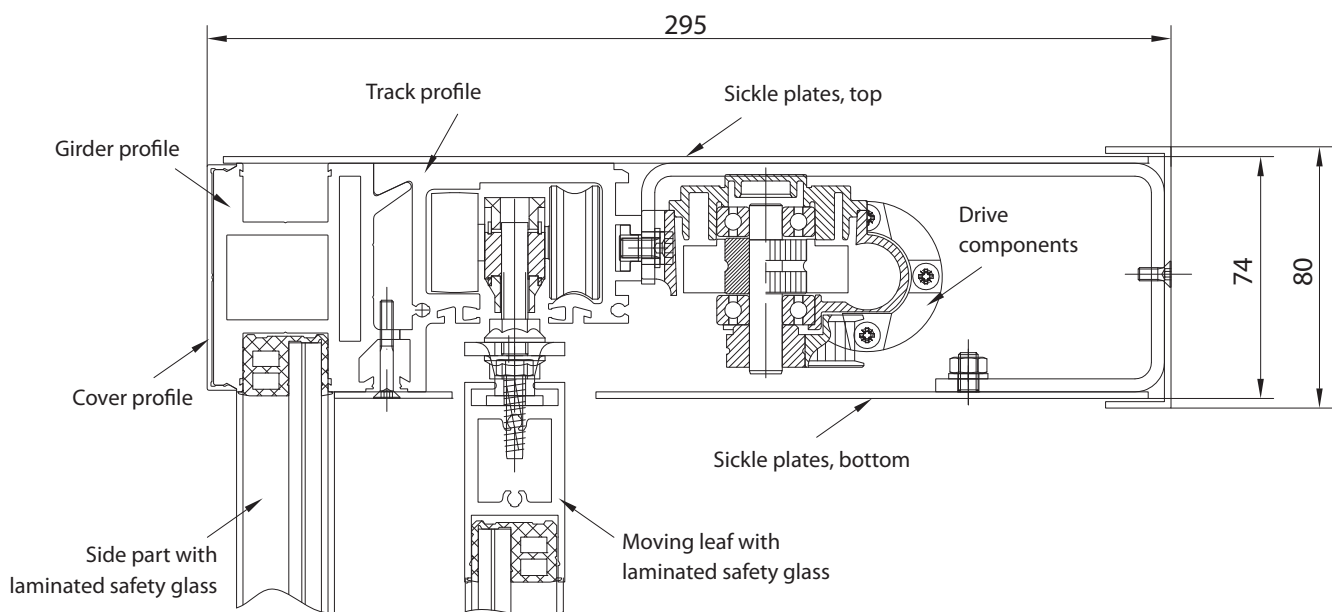

GEZE SLIMDRIVE SC/SCR


SLIMDRIVE SC(-FR)

Side part area

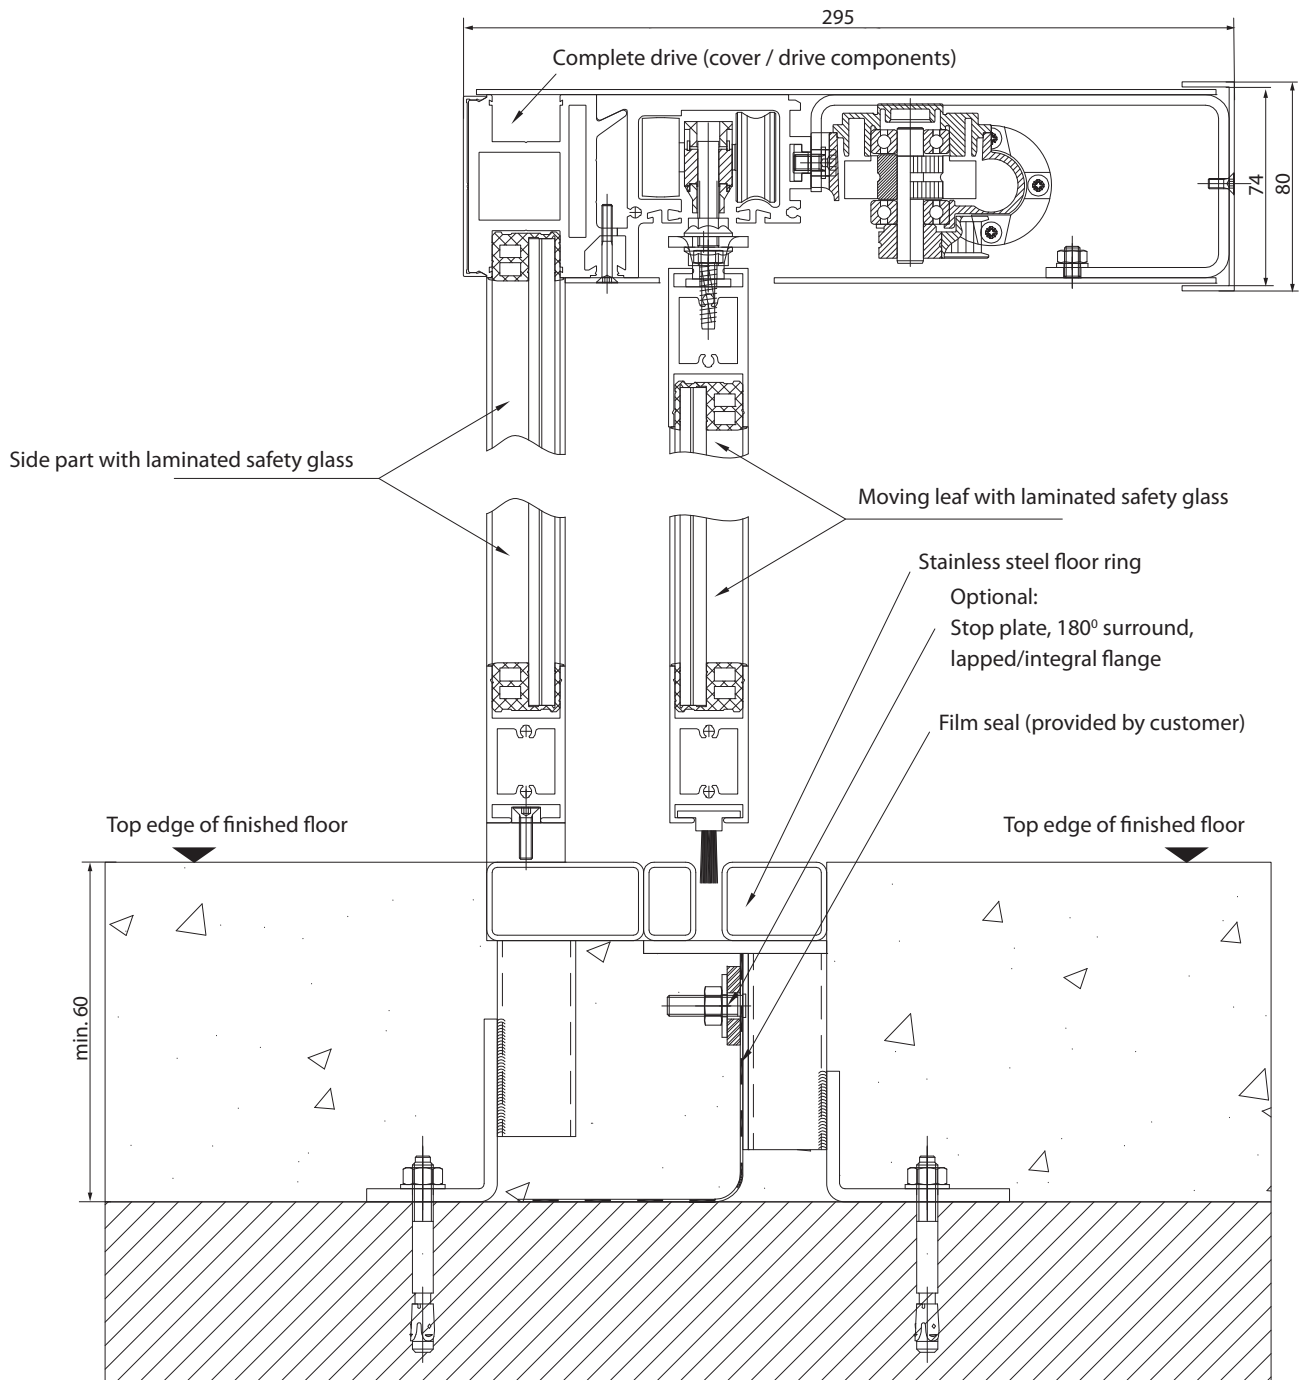

SLIMDRIVE SCR(-FR)





Transit area

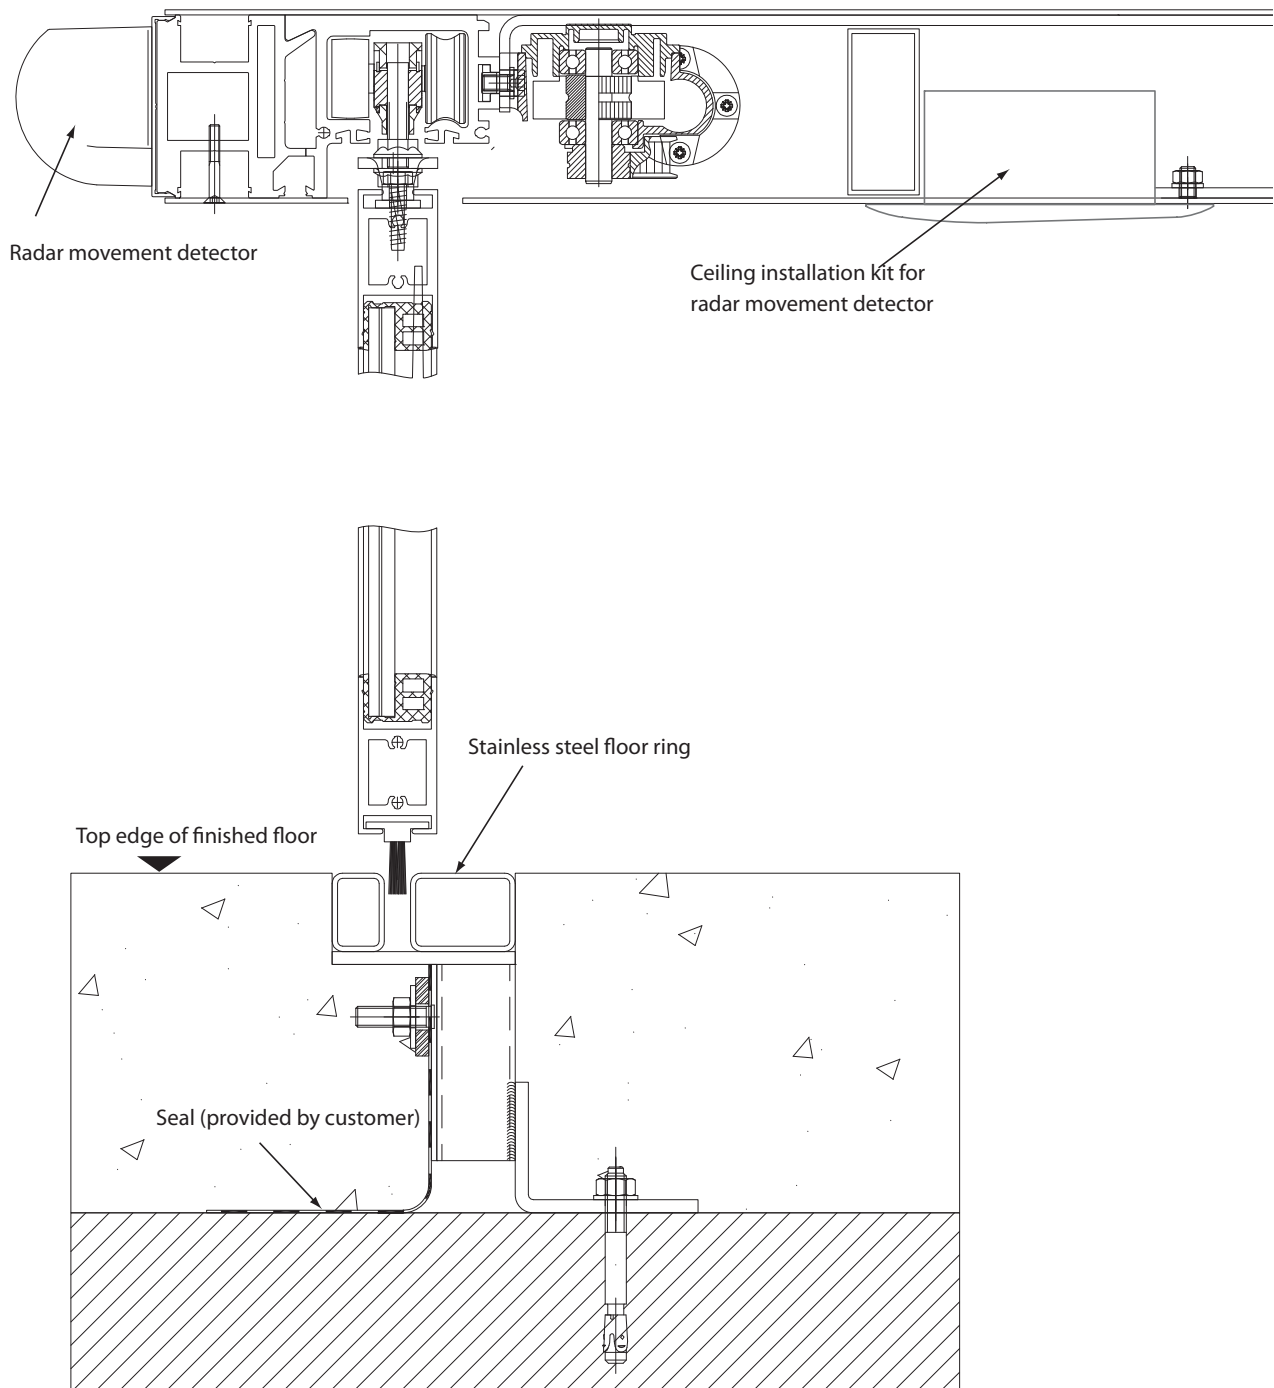

GEZE SLIMDRIVE SC/SCR

SLIMDRIVE SC(-FR)

Horizontal sections

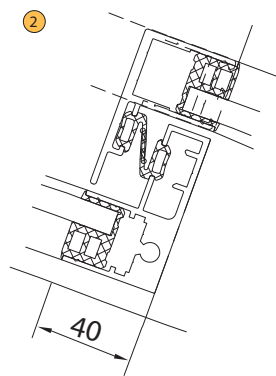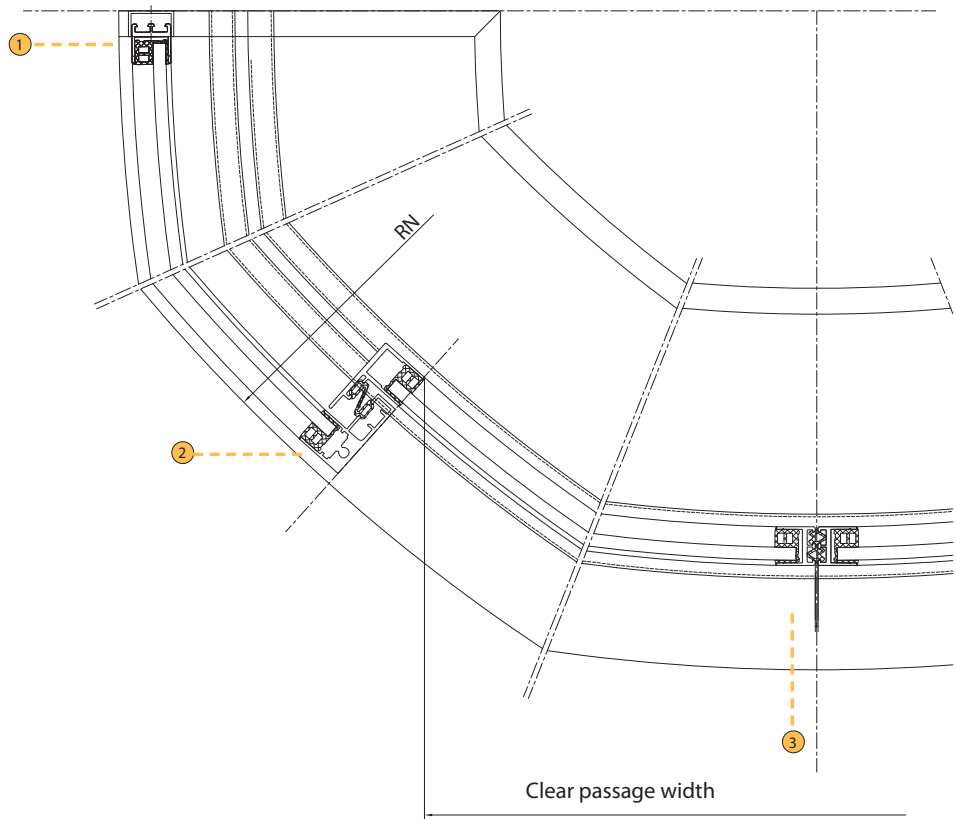


Key

RN	Nominal radius
----	----------------


HOT-AIR CURTAINS

In raised ceiling dome

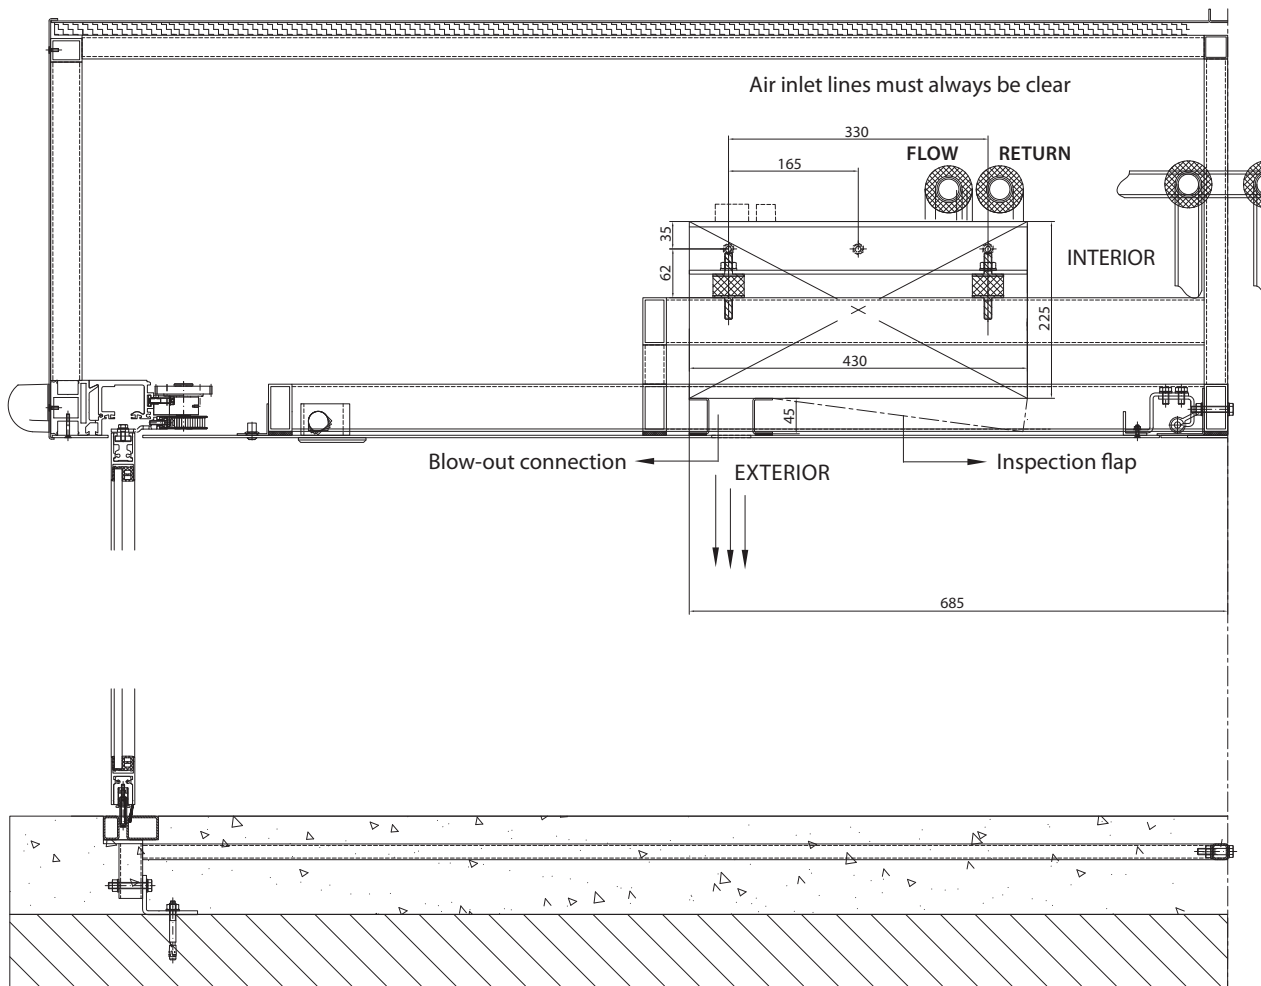

HOT-AIR CURTAINS

In suspended ceiling

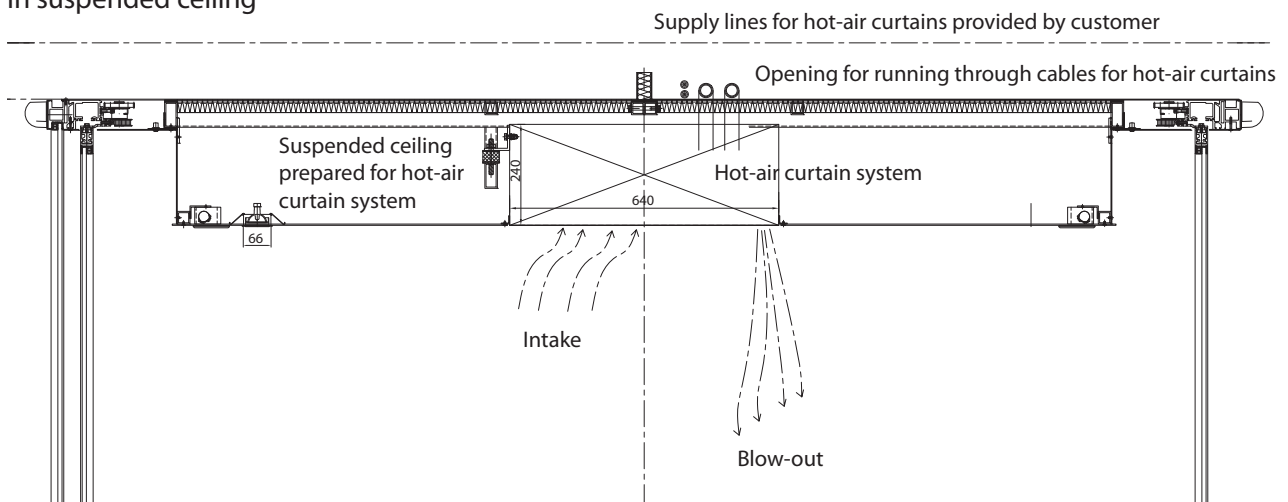

GEZE SLIMDRIVE SC/SCR

FLOOR RING

Side part with laminated safety glass

Moving leaf with laminated safety glass

Finished floor

Stainless steel floor ring

Optional: Floor covering/
strip mat

Unfinished floor

min. 60

30



22

20

Optional: Lapped/integral flange


Film seal (provided by customer)

Optional: Stop plate, 180° surround

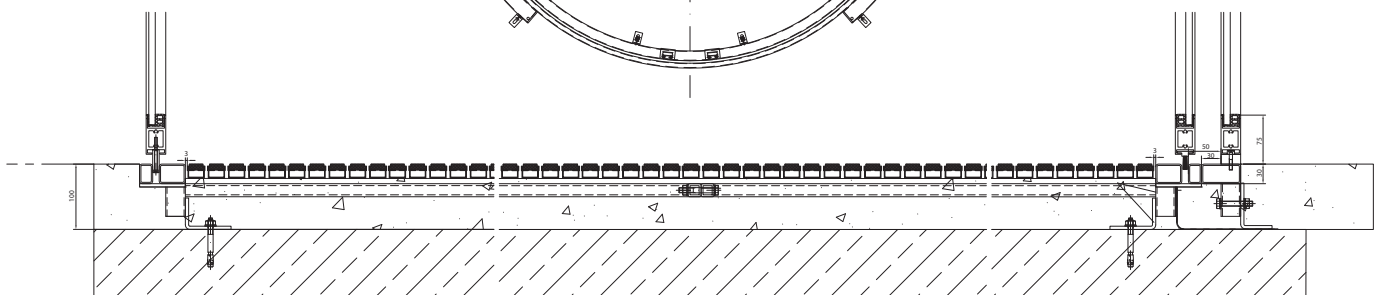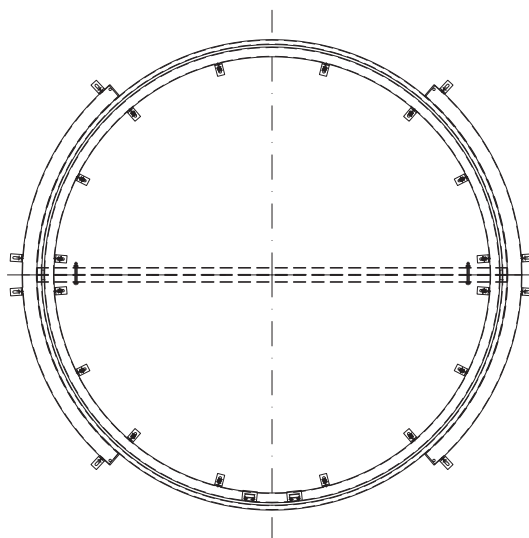


FACADE CONNECTION

With sheet metal panel

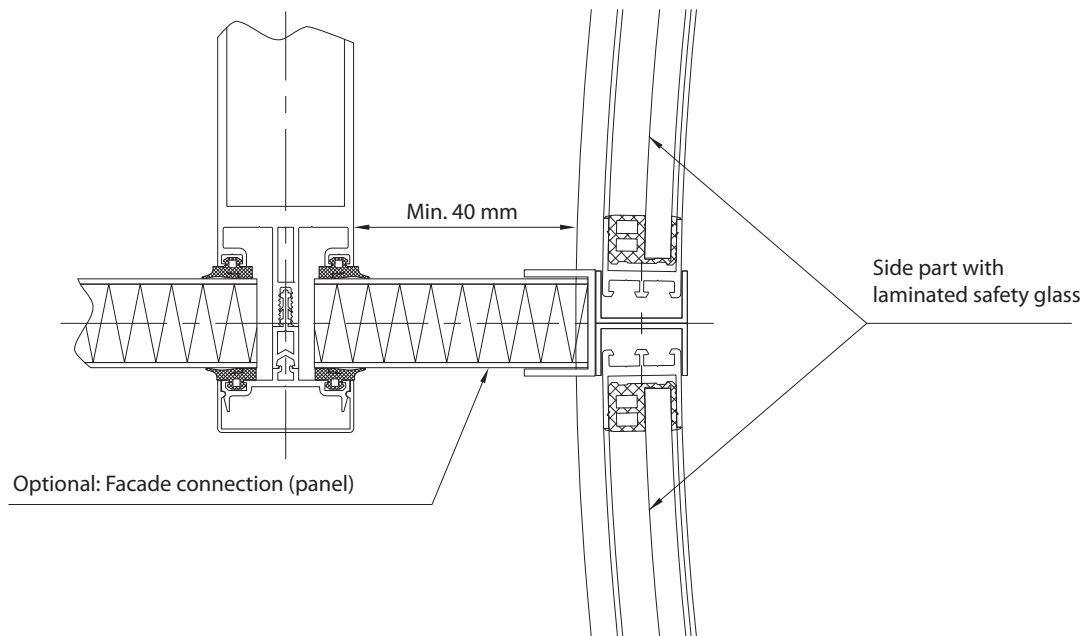


FACADE CONNECTION

With glass pane

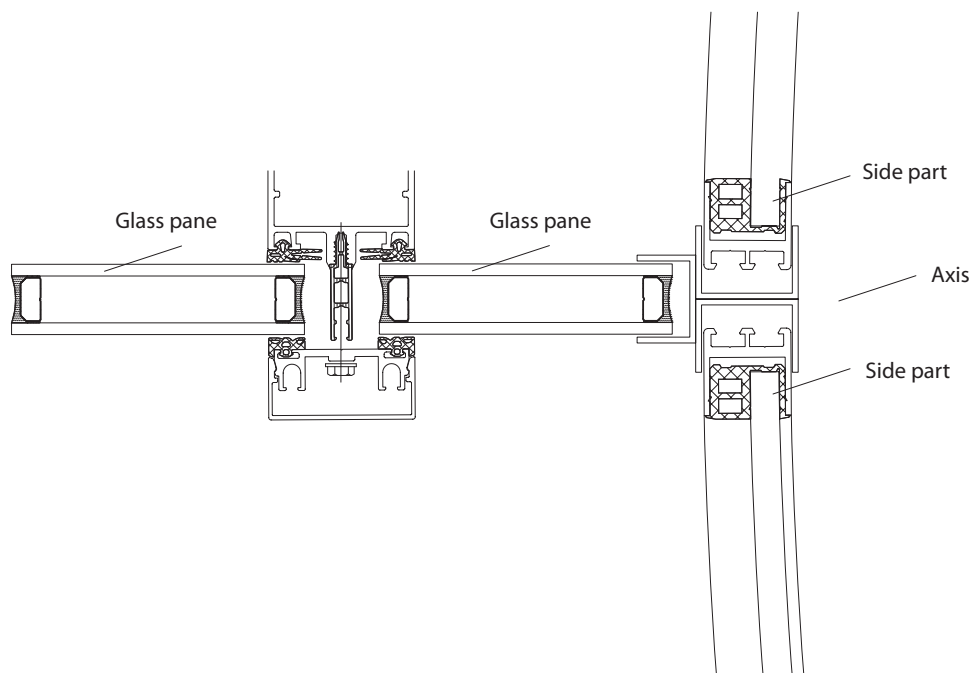

FACADE CONNECTION

Top – with umbrella roof

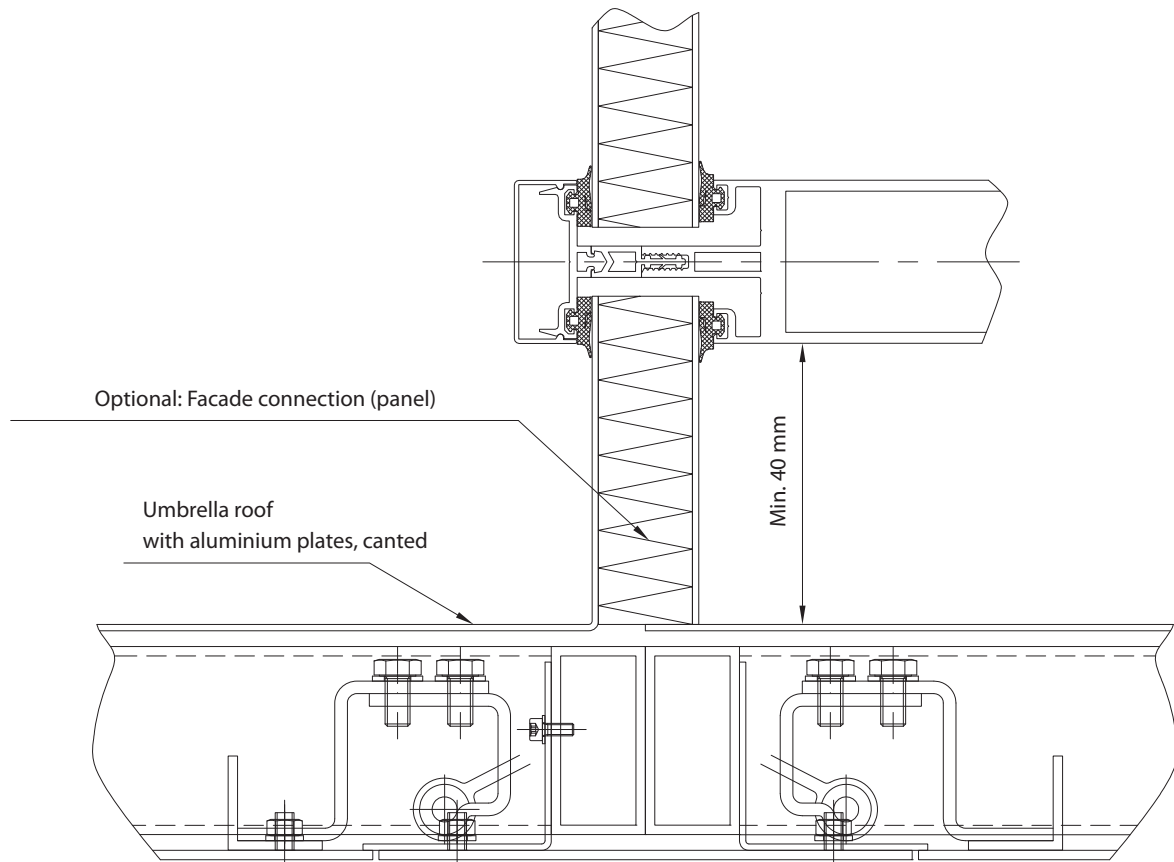

Slimdrive SL-SC cable diagram

HS	Main switch
NS	Emergency off switch ³⁾
DPS	Display programme switch
SCT	Key-operated programme switch
KI	Internal actuation device ¹⁾
KA	External actuation device ²⁾
ST	Key-operated switch
AÖ	Reduced width opening facility
NV	Emergency lock
SM	Fault detector Fault lamp or fault horn

Notes:

- 1) One or more actuation devices (KI) can be installed.
When installing an integrated movement detector, the cables are laid in the drive.
- 2) One or more external actuation devices (KA) can be installed.
- 3) Attach emergency off switches in the right-hand escape direction

Drawing no. 70484-9-0955

Refer to connection diagram 70484-9-0954


Safety notes:

Cable routing as per VDE 0100

Cable routing, connection work and commissioning may only be carried out by authorised experts.

Wire cross-sections:

- ① NYM-J 3 x 1.5 mm²
- ② I-Y(ST)Y 2 x 0.6 mm
- ③ I-Y(ST)Y 2 x 2 x 0.6 mm
- ④ NYM-J 5 x 1.5 mm²
- Y 5 x 0.25 mm² (GEZE scope of delivery for GEZE products)
- * For pressure switches

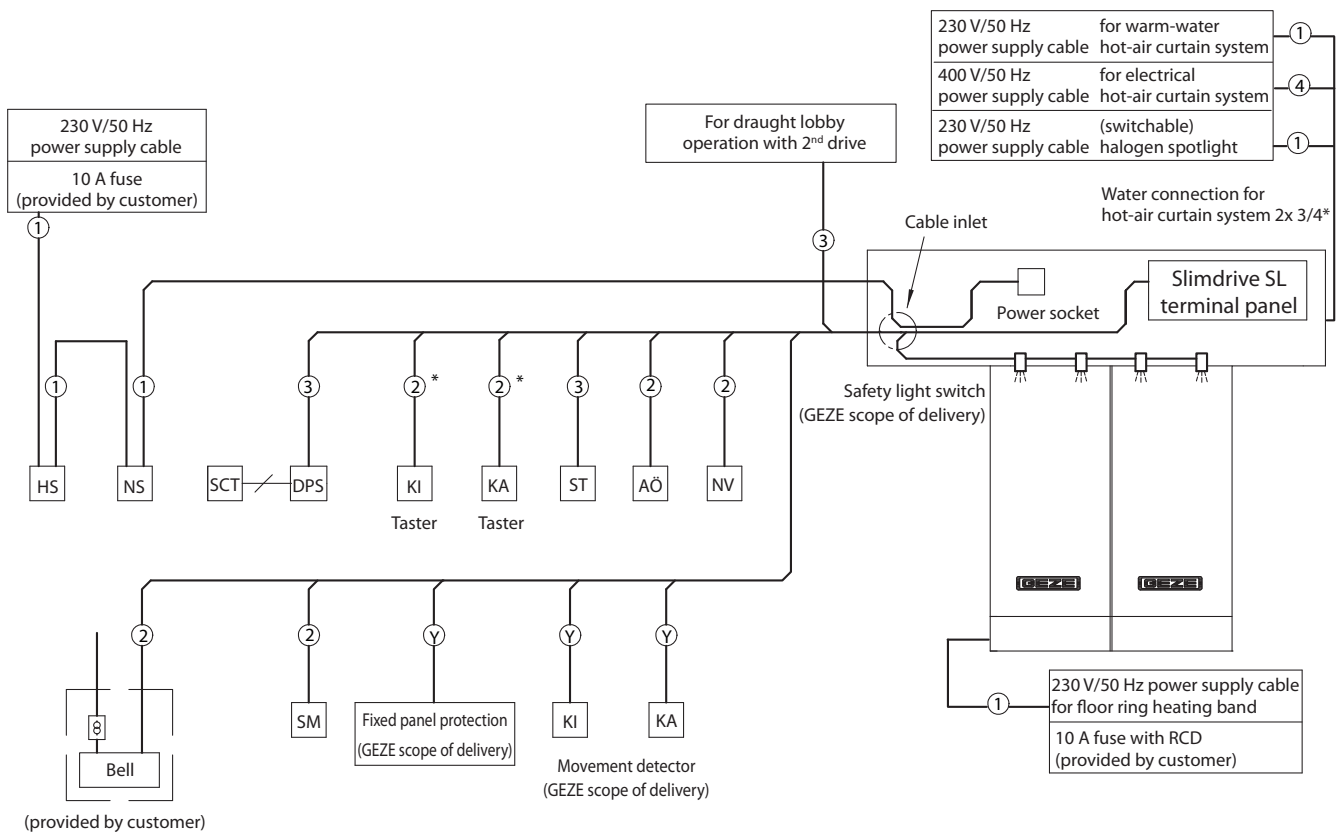

Protecting the transit area with semi-circular and circular sliding doors in accordance with DIN 18650

Standard sensor system package for SC systems


- Package for clear passages of up to 1600 mm



- 1** Optional:
GC 304 rain cover for
protecting radar detector
in outdoor area



- 2** GC 304 R and GC 304 SF
radar detector (in escape
direction) for controlling
automatic door

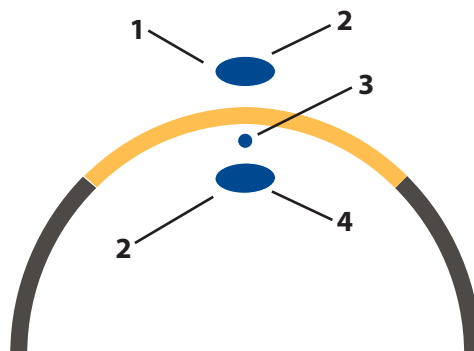

- 3** HZC ultrasound system for
protecting the opening width



- 4** GC 304 ceiling installation kit
for integrating radar detector
into ceiling

DIN 18650 safety sensor system package for SC systems


- Package for clear passages from 1601 mm



- 1** Optional:
GC 362 rain cover for
protecting combination
detector/light curtain in
outdoor area



- 2** GC 362 R and GC 362 SF
combination detector
(in escape direction) for
controlling automatic door

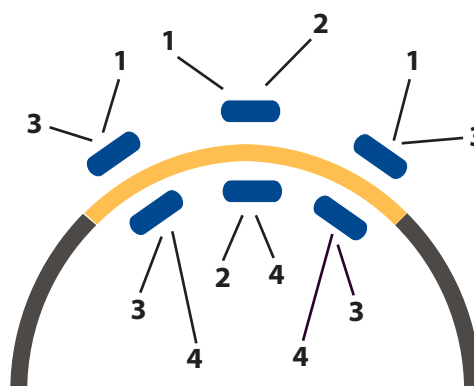

- 3** GC 333 light curtain for
protecting the opening width



- 4** Optional:
GC 362 ceiling installation kit
for integrating combination
detector / light curtain into
ceiling

GEZE Slimdrive SC/SC-FR WK2



DIN 18650



The new GEZE Slimdrive SC WK2 sliding door system makes life difficult for burglars. The burglar resistant automatic curved sliding door system GEZE Slimdrive SC WK2 and the emergency exit variant SC-FR WK2 are just as stylish and unobtrusive as the tried and tested standard Slimdrive SC variants. With an unrivalled low overall height of only seven centimetres, the drive of the Slimdrive SC WK2 sliding door system is perfect for glass façades with slender profiles in post-rail structures.

The new system provides particular protection against burglary and vandalism. It has been especially developed for building entrances with increased security requirements, such as banks, dispensing chemists, jewellers, petrol stations or interiors with contents requiring particular protection, for example, computer rooms.

Slimdrive SC WK2 and SC-FR WK2 have been tested for component resistance class 2 (WK2) in accordance with prEN 1627 to 1630. This means that they successfully withstand burglary attempts with WK2 class tools such as screwdrivers, pipe wrenches and wedges and the static and dynamic loads. Opportunistic intruders are effectively stopped and security services gain response time.



SGL Carbon, Meitingen


TECHNICAL DATA

Slimdrive	SC WK2	SC-FR WK2
Dimensions of drive unit	70 x 295 mm	
For double-leaf door systems	●	
Max. weight per leaf	120 kg	
Opening width	900 - 3000 mm	
Passage height	max. 3000 mm	

● = standard/serial-production

GEZE SLIMDRIVE SC/SCR

GEZE SLIMDRIVE SC/SC-FR WK2




Burglar resistant sliding door system with an overall height of only 7cm and thin-framed hardware system tested to resistance class 2.

Product features

- Certified in accordance with DIN 18650
- Stylish, unobtrusive 7cm look with thin-framed ISO hardware system
- Certified burglary resistance to resistance class 2 (prEN 1627 to 1630)
- Passage height up to 3000 mm available with MONO safety glass for WK2 (laminated safety glass (VSG) 55.4) or ISO safety glass for WK2 (VSG 44.4 + air space (SZR) 8 + single pane toughened safety glass (ESG) 5), according to EN 356
- Reinforced anti-tilt roller carriage version
- Additional mechanical access protection in the area of the top door shoe against manipulation of the roller carriages
- Reinforced bi-stable electromechanical rod lock invisibly integrated in the profile system with manual emergency unlocking in the drive and optional potential-free contact for lock monitoring and signalling of the door state to an alarm system or to a building management system
- Continuous floor guide made of stainless steel

With Slimdrive SC-FR WK2 version

- Escape route function with redundant drive and wear-resistant two-motor technology, also available in the RWS, LL and DUO variants.

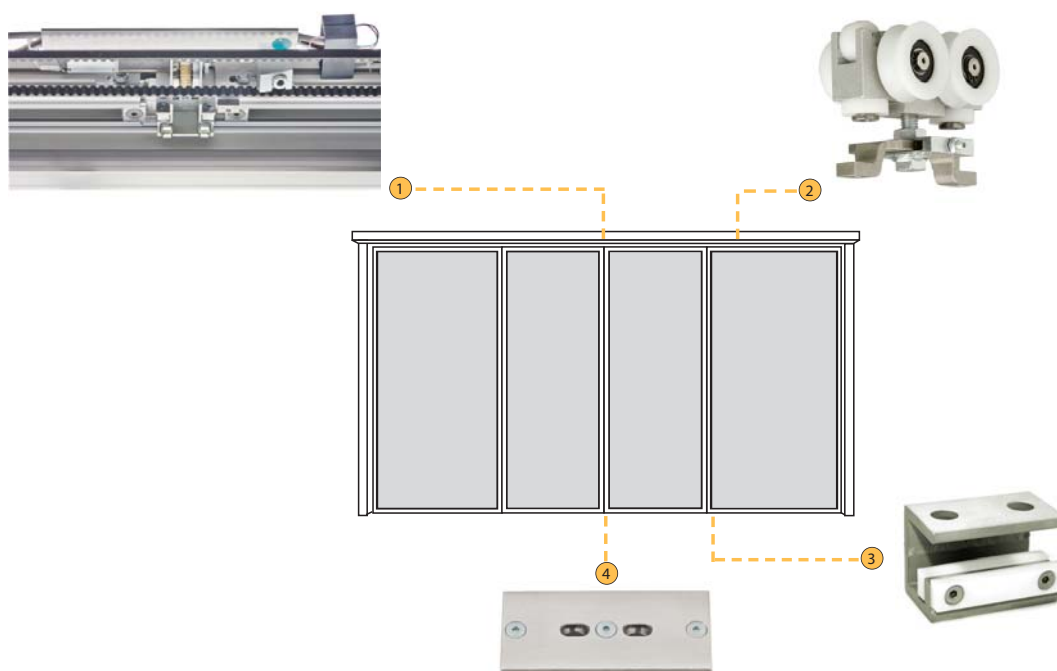


GEZE Slimdrive SC WK2 – Burglary resistant components


Components	
①	Rod lock
②	Anti-tilt roller carriage
③	Continuous slide floor guide
④	Reinforced floor plate

**INSTALLATION VARIATIONS Double-leaf
 SLIMDRIVE SC WK2**

- Max. door leaf weight 2 x 120 kg
- Max. ratio of leaf height/leaf width = 1 : 4
 calculation based on a leaf weight of 30 kg/m²

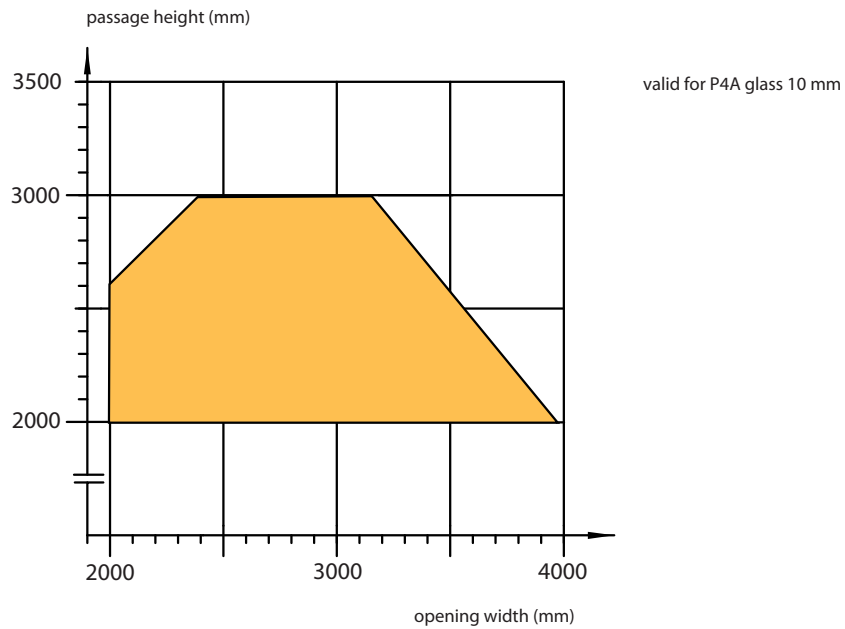

**VERTICAL SECTION
 SLIMDRIVE SC WK2**

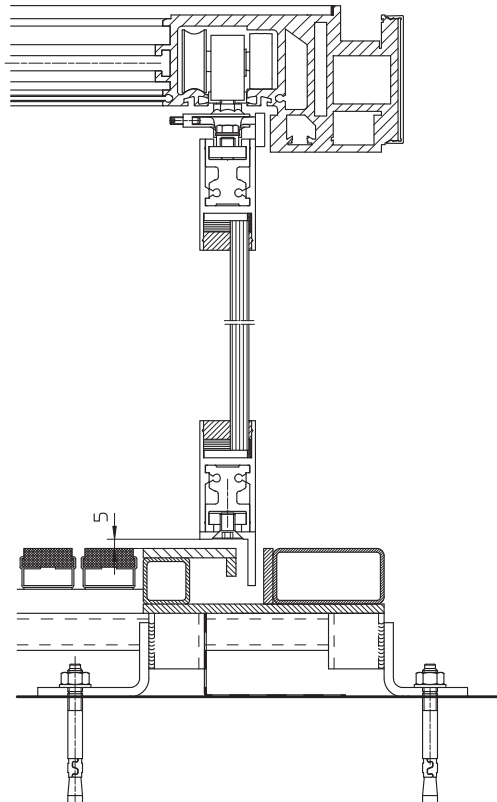

GEZE SLIMDRIVE SC/SCR

Nachweis

einbruchhemmende Eigenschaften

Prüfbericht 212 43764



Auftraggeber **GEZE GmbH**
 Reinhold-Vöster-Str. 21 - 29
 71229 Leonberg

Grundlagen

DIN V ENV 1627 : 1999
 Fenster, Türen, Abschlüsse -
 Einbruchhemmung – Anforderungen und Klassifizierung
 DIN V ENV 1628 : 1999
 DIN V ENV 1629 : 1999
 DIN V ENV 1630 : 1999

Produkt **einbruchhemmende 2-flg. Rundschiebetür**
 Bezeichnung **Slimdrive SC/-FR WK2**

Darstellung



Außenmaß (B x H) **2855 mm x 2930 mm**
 (Rahmen) **Aluminium**
 Material, System **GEZE ISO-Profilsystem / GEZE Antriebsprofile SC-Serie**
 Angriffseite **Elementaußenseite**
 Öffnungsart **aufschiebbar, (Bogenführung)**
 Verglasung **Klasse P4 A nach DIN EN 356**
ISO-Glasbeschlag als elektromechanische Stangenverriegelung mit 4 Verriegelungspunkten und 4 Rollwagen der Firma GEZE GmbH und 4 Schutzwinkel HSK/NSK in Bodenführung
 Beschläge **Gemäß der Montageanleitung der Firma GEZE GmbH**
 Montage **GEZE GmbH**
 Besonderheiten **-/-**

Verwendungshinweise

Dieser Prüfbericht dient zum Nachweis der einbruchhemmenden Eigenschaften.

Gültigkeit

Die genannten Daten und Ergebnisse beziehen sich ausschließlich auf den geprüften und beschriebenen Probekörper. Die Prüfung der Einbruchhemmung ermöglicht keine Aussage über weitere leistungs- und qualitätsbestimmende Eigenschaften der vorliegenden Konstruktion.

Abweichend von geprüfter Ausführung sind folgende Größenänderungen zulässig:
 in der Breite +10% und -20%
 in der Höhe +10% und -20%

Einbruchhemmung



Widerstandsklasse 2

Veröffentlichungshinweise

Es gilt das ift-Merkblatt „Bedingungen und Hinweise zur Benutzung von ift-Prüf-dokumentationen“. Das Deckblatt kann als Kurzfassung verwendet werden.

Inhalt

Der Nachweis umfasst insgesamt 93 Seiten

- 1 Gegenstand
- 2 Durchführung
- 3 Einzelergebnissen
- 4 Beurteilung
- Anlage 1 (53 Seiten)
- Anlage 2 (12 Seite)

ift Rosenheim
 02. Dezember 2010

Christian Kehr
 Christian Kehr, Dipl.-Ing. (FH)
 Prüfstellenleiter

Jens Pickelmann
 Jens Pickelmann
 Prüfenieur
 Labor Mechanik



PTE Rosenheim GmbH
 ift Zentrum – Türen Tore Sicherheit
 Geschäftsführer
 Dr. Jochen Peichl

Theodor-Gietl-Str. 7 - 9
 D-83026 Rosenheim
 Tel.: +49 (0)8031/261-0
 Fax: +49 (0)8031/261-290
 www.pte-rosenheim.de

Sitz 83026 Rosenheim
 AG Traunstein, HRB 14822
 Sparkasse Rosenheim
 Kto. 500 436 805
 BLZ 711 500 00

Notified Body Nr. 0757
 Anerkannte PUZ-Stelle: BAY 18



References



Automatic sliding door GEZE Slimdrive SCR-FR



BHF-Bank Frankfurt, Germany



Automatic semi-circular sliding door GEZE Slimdrive SC



Cafe Luitpold, Munich, Germany



Hotel Domina Inn, Milan, Italy



Automatic circular sliding door GEZE Slimdrive SCR

GEZE SLIMDRIVE SC/SCR

References



GEZE Slimdrive SCR automatic circular sliding door with glass cylinder fitted



The Scotch Whisky Experience, Edinburgh, UK



GEZE Slimdrive SC automatic semi-circular sliding door



CGG Drenova Cemetery, Rijeka, Croatia



Hotel Mövenpick, Hamburg, Germany



GEZE Slimdrive SCR automatic circular sliding door

References



GEZE Slimdrive SCR-FR automatic circular sliding door



Dongen, Noord-Brabant NL



GEZE Slimdrive SC-FR automatic semi-circular sliding door with glass skylight



Jugendstilbad, Darmstadt Germany



GEZE Slimdrive SC automatic semi-circular sliding door



Dornier Museum, Friedrichshafen, Germany

GEZE GmbH
P.O. Box 1363
71226 Leonberg
Germany

GEZE GmbH
Reinhold-Vöster-Straße 21-29
71229 Leonberg
Germany
Telefon +49 (0) 7152-203-0
Telefax +49 (0) 7152-203-310
www.geze.com

Germany
GEZE Sonderkonstruktionen GmbH
Planken 1
97944 Boxberg-Schweigern
Tel. +49 (0) 7930-92 94-0
Fax +49 (0) 7930-92 94-10
E-Mail: sk.de@geze.com

GEZE GmbH
Niederlassung Nord/Ost
Bühningstraße 8
13086 Berlin (Weissensee)
Tel. +49 (0) 30-47 89 90-0
Fax +49 (0) 30-47 89 90-17
E-Mail: berlin.de@geze.com

GEZE GmbH
Niederlassung West
Nordsternstraße 65
45329 Essen
Tel. +49 (0) 201-83 082-0
Fax +49 (0) 201-83 082-20
E-Mail: essen.de@geze.com

GEZE GmbH
Niederlassung Mitte
Adenauerallee 2
61440 Oberursel (b. Frankfurt)
Tel. +49 (0) 6171-63 610-0
Fax +49 (0) 6171-63 610-1
E-Mail: frankfurt.de@geze.com

GEZE GmbH
Niederlassung Süd
Breitwiesenstraße 8
71229 Leonberg
Tel. +49 (0) 7152-203-594
Fax +49 (0) 7152-203-438
E-Mail: leonberg.de@geze.com

GEZE Service GmbH NL Südwest
Reinhold-Vöster-Straße 25
71229 Leonberg
Tel. +49 (0) 7152-92 33 34

GEZE Service GmbH NL Nord-Ost
Bühningstraße 8
13086 Berlin (Weissensee)
Tel. +49 (0) 30-47 02 17 32

GEZE Service GmbH NL West
Nordsternstraße 65
45329 Essen
Tel. +49 (0) 201-8 30 82 16

GEZE Service GmbH NL Mitte
Feldbergstrasse 59
61440 Oberursel
Tel. +49 (0) 6171-63 61 03

GEZE Service GmbH NL Süd
Keltenring 10
85658 Eggenmating
Tel. +49 (0) 8095-87 13 61

Austria
GEZE Austria
Wiener Bundesstrasse 85
A-5300 Hallwang
Tel: +43/6225/87180
Fax: +43/6225/87180-299
E-Mail: austria.at@geze.com

Baltic States
GEZE GmbH Baltic States office
Dzelzavas iela 120 S
1021 Riga
Tel. +371 (0) 67 89 60 35
Fax +371 (0) 67 89 60 36
E-Mail: office-latvia@geze.com

Benelux
GEZE Benelux B.V.
Leemkuil 1
Industrieterrein Kapelbeemd
5626 EA Eindhoven
Tel. +31 (0) 40-26 290-80
Fax +31 (0) 40-26 290-85
E-Mail: benelux.nl@geze.com

Bulgaria
GEZE Bulgaria - Trade
Representative Office
61 Pirinski Prohod, entrance „B“,
4th floor, office 5,
1680 Sofia
Tel. +359 (0) 24 70 43 73
Fax +359 (0) 24 70 62 62
E-Mail: office-bulgaria@geze.com

China
GEZE Industries (Tianjin) Co., Ltd.
Shuangchenzhong Road
Beichen Economic Development
Area (BEDA)
Tianjin 300400, P.R. China
Tel. +86 (0) 22-26 97 39 95-0
Fax +86 (0) 22-26 97 27 02
E-Mail: Sales-info@geze.com.cn

GEZE Industries (Tianjin) Co., Ltd.
Branch Office Shanghai
Unit 25N, Cross Region Plaza
No 899, Ling Ling Road,
Xuhui District
200030 Shanghai, P.R. China
Tel. +86 (0) 21-523 40 960
Fax +86 (0) 21-644 72 007
E-Mail: chinasales@geze.com.cn

GEZE Industries (Tianjin) Co., Ltd.
Branch Office Guangzhou
Room 17C3
Everbright Bank Building, No.689
Tian He Bei Road
510630 Guangzhou
P.R. China
Tel. +86 (0) 20-38 73 18 42
Fax +86 (0) 20-38 73 18 34
E-Mail: chinasales@geze.com.cn

GEZE Industries (Tianjin) Co., Ltd
Branch Office Beijing
Room 1001, Tower D
Sanlitun SOHO
No. 8, Gongti North Road,
Chaoyang District
100027 Beijing, P.R.China
Tel. +86 (0) 10-59 35 93 00
Fax +86 (0) 10-59 35 93 22
E-Mail: chinasales@geze.com.cn

France
GEZE France S.A.R.L.
ZAC de l'Orme Rond
RN 19
77170 Servon
Tel. +33 (0) 1-60 62 60-70
Fax +33 (0) 1-60 62 60-71
E-Mail: france.fr@geze.com

Hungary
GEZE Hungary Kft.
Bartók Béla út 105-113.
Budapest
H-1115
Tel. +36 (1) 481 4670
Fax +36 (1) 481 4671
E-Mail: office-hungary@geze.com

Iberia
GEZE Iberia S.R.L.
Pol. Ind. El Pla
C/Comerc, 2-22, Nave 12
08980 Sant Feliu de Llobregat
(Barcelona)
Tel. +34 (0) 9-02 19 40 36
Fax +34 (0) 9-02 19 40 35
E-Mail: info@geze.es

India
GEZE India Private Ltd.
MF 2 & 3, Guindy Industrial Estate
Ekkattuthangal
Chennai 600 097
Tamilnadu
Tel. +91 (0) 44 30 61 69 00
Fax +91 (0) 44 30 61 69 01
E-Mail: office-india@geze.com

Italy
GEZE Italia Srl
Via Giotto, 4
20040 Cambiago (MI)
Tel. +39 (0) 29 50 695-11
Fax +39 (0) 29 50 695-33
E-Mail: italia.it@geze.com

GEZE Engineering Roma Srl
Via Lucrezia Romana, 91
00178 Roma
Tel. +39 (0) 6-72 65 311
Fax +39 (0) 6-72 65 3136
E-Mail: roma@geze.biz

Poland
GEZE Polska Sp.z o.o.
ul. Annapol 21
03-236 Warszawa
Tel. +48 (0) 22 440 4 440
Fax +48 (0) 22 440 4 400
E-Mail: geze.pl@geze.com

Romania
GEZE Romania s.r.l.
IRIDE Business Park,
Str. Dimitrie Pompeiu nr. 9-9a,
Building 10, Level 2, Sector 2,
020335 Bucharest
Tel.: +40 (0) 21 25 07 750
Fax: +40 (0) 21 25 07 750
E-Mail: office-romania@geze.com

Russian Federation
GEZE GmbH Representative
Office Russia
Kolodesnij pereulok3, str. 25
Office Nr. 5201-5203
107076 Moskau
Tel. +7 (0) 49 55 89 90 52
Fax +7 (0) 49 55 89 90 51
E-Mail: office-russia@geze.com

Scandinavia – Sweden
GEZE Scandinavia AB
Mallslingan 10
Box 7060
18711 Täby, Sweden
Tel. +46 (0) 8-7323-400
Fax +46 (0) 8-7323-499
E-Mail: sverige.se@geze.com

Scandinavia – Norway
GEZE Scandinavia AB avd. Norge
Industriveien 34 B
2073 Dal
Tel. +47 (0) 639-57 200
Fax +47 (0) 639-57 173
E-Mail: norge.se@geze.com

Scandinavia – Finland
Branch office of GEZE Scandinavia AB
Herralantie 824
Postbox 20
15871 Hollola
Tel. +358 (0) 10-40 05 100
Fax +358 (0) 10-40 05 120
E-Mail: finland.se@geze.com

Scandinavia – Denmark
GEZE Danmark
Branch office of GEZE Scandinavia AB
Mårkærvej 13 J-K
2630 Taastrup
Tel. +45 (0) 46-32 33 24
Fax +45 (0) 46-32 33 26
E-Mail: danmark.se@geze.com

South Africa
DCLSA Distributors (Pty.) Ltd.
118 Richards Drive, Halfway House,
Ext 111
P.O. Box 7934, Midrand 1685
Tel. +27 (0) 1131 58 286
Fax +27 (0) 1131 58 261
E-Mail: info@dclsa.co.za

Switzerland
GEZE Schweiz AG
Bodenackerstrasse 79
4657 Dulliken
Tel. +41 (0) 62-28 55 400
Fax +41 (0) 62-28 55 401
E-Mail: schweiz.ch@geze.com

Turkey
GEZE GmbH Türkiye - İstanbul
İrtibat Bürosu
Ataşehir Bulvarı, Ata 2/3
Plaza Kat: 9 D: 84 Ataşehir
Kadıköy / İstanbul
Tel. + 90 (0) 21 64 55 43 15
Fax + 90 (0) 21 64 55 82 15
E-Mail: office-turkey@geze.com

Ukraine
GEZE Ukraine TOV
ul. Viskoznaya, 17,
Building 93-B, Office 12
02094 Kiev
Tel./Fax +38 (0) 44 501 22 25
Tel. +38 (0) 44 499 77 25
E-Mail: office-ukraine@geze.com

United Arab Emirates/GCC
GEZE Middle East
P.O. Box 17903
Jebel Ali Free Zone
Dubai
Tel. +971 (0) 4-88 33 112
Fax +971 (0) 4-88 33 240
E-Mail: geze@emirates.net.ae

United Kingdom
GEZE UK Ltd.
Blenheim Way
Fradley Park
Lichfield
Staffordshire WS13 8SY
Tel. +44 (0) 1543 44 30 00
Fax +44 (0) 1543 44 30 01
E-Mail: info.uk@geze.com

GEZE REPRESENTATIVE