

DIMENSIONES GENERALES / OVERALL DIMENSIONS

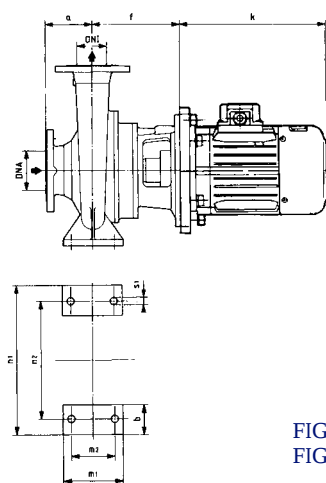


FIGURA A
FIGURE A

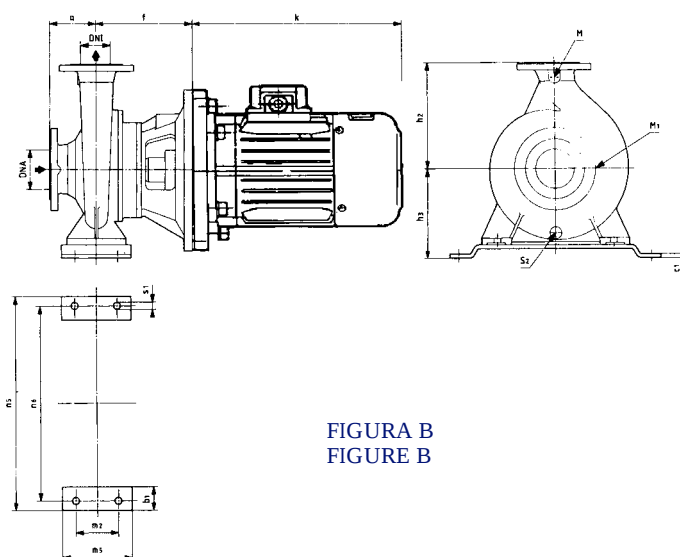


FIGURA B
FIGURE B



GRUPOS A 2.950 r.p.m./ GROUPS AT 2.950 r.p.m.

TIPO TYPE	MOTOR MOTOR		BRIDAS FLANGES		BOMBA PUMP								PATAS DE APOYO FEET												PESO WEIGHT (1) (Kg.)
	CV HP	Tam. Size	DNa	DNI	Fig.	a	f	k (1)	h1	h2	h3	x	b	b1	m1	m2	m5	n1	n2	n5	n6	c	c1	s1	
32-165	3	90 L	50	32	A	80	158	282	132	160		100	50		100	70		240	190			15		M12	45
32-163	4	100 L	50	32	A	80	170	306	132	160		100	50		100	70		240	190			15		M12	51
32-161	5,5	112 M	50	32	A	80	170	328	132	160		100	50		100	70		240	190			15		M12	55
32-203	7,5	132 S	50	32	A	80	195	369	160	180		100	50		100	70		240	190			15		M12	88
32-201	10	132 S	50	32	A	80	195	369	160	180		100	50		100	70		240	190			15		M12	97
40-165	4	100 L	65	40	A	80	170	306	132	160	160	100	50	50	100	70	120	240	190	370	330	15	8	M12	53
40-163	5,5	112 M	65	40	A	80	170	328	132	160	160	100	50	50	100	70	120	240	190	370	330	15	8	M12	62
40-161	7,5	132 S	65	40	B	80	195	369	132	160	160	100	50	50	100	70	120	240	190	370	330	15	8	M12	85
40-203	10	132 S	65	40	A	100	203	369	160	180	180	100	50	50	100	70	120	265	212	400	360	15	8	M12	100
40-201	15	160 M	65	40	B	100	235	475	160	180	180	100	50	50	100	70	120	265	212	400	360	15	8	M12	145
40-265	15	160 M	65	40	A	100	235	475	180	225		100	65		125	95		320	250			15		M12	163
40-264	20	160 M	65	40	A	100	235	475	180	225		100	65		125	95		320	250			15		M12	174
40-262	25	160 L	65	40	A	100	235	519	180	225		100	65		125	95		320	250			15		M12	188
50-163	7,5	132 S	65	50	A	100	195	369	160			100	50		100	70		265	212			15		M12	85
50-161	10	132 S	65	50	A	100	195	369	160			100	50		100	70		265	212			15		M12	92
50-205	10	132 S	65	50	A	100	203	369	160	200	180	100	50	50	100	70	120	265	212	400	360	15	8	M12	101
50-203	15	160 M	65	50	B	100	235	475	160	200	180	100	50	50	100	70	120	265	212	400	360	15	8	M12	130
50-201	20	160 M	65	50	B	100	235	475	160	200	180	100	50	50	100	70	120	265	212	400	360	15	8	M12	141
50-264	25	160 L	65	50	A	100	235	519	180	225		100	65		125	95		320	250			15		M12	190
65-165	7,5	132 S	80	65	A	100	203	369	160	200		100	65		125	95		280	212			15		M12	100
65-163	12,5	132 M	80	65	A	100	203	407	160	200		100	65		125	95		280	212			15		M12	127
65-161	20	160 M	80	65	A	100	235	475	160	200		100	65		125	95		280	212			15		M12	141
65-204	20	160 M	80	65	A	100	235	475	180	225		140	65		125	95		320	250			15		M12	160
65-202	25	160 L	80	65	A	100	235	519	180	225		140	65		125	95		320	250			15		M12	185
80-164	12,5	132 M	100	80	A	125	203	407	180	225		140	65		125	95		320	250			15		M12	143
80-163	20	160 M	100	80	A	125	235	475	180	225		140	65		125	95		320	250			15		M12	157
80-161	25	160 L	100	80	A	125	235	519	180	225		140	65		125	95		320	250			15		M12	179


GRUPOS A 1.450 r.p.m./ GROUPS AT 1.450 r.p.m.

TIPO TYPE	MOTOR MOTOR		BRIDAS FLANGES		BOMBA PUMP							PATAS DE APOYO FEET							PESO WEIGHT (1) (Kg.)
	CV HP	Tam. Size	DNa	DNI	Fig.	a	f	k (1)	h1	h2	x	b	m1	m2	n1	n2	c	s1	
32-165	0,5	71	50	32	A	80	132	210	132	160	100	50	100	70	240	190	15	M12	35
32-163	0,5	71	50	32	A	80	132	210	132	160	100	50	100	70	240	190	15	M12	35
32-161	0,75	80	50	32	A	80	158	234	132	160	100	50	100	70	240	190	15	M12	38
32-203	1	80	50	32	A	80	158	234	160	180	100	50	100	70	240	190	15	M12	42
32-201	1,5	90 S	50	32	A	80	158	234	160	180	100	50	100	70	240	190	15	M12	45
40-165	0,5	71	65	40	A	80	132	210	132	160	100	50	100	70	240	190	15	M12	37
40-163	0,75	80	65	40	A	80	158	234	132	160	100	50	100	70	240	190	15	M12	40
40-161	1	80	65	40	A	80	158	234	132	160	100	50	100	70	240	190	15	M12	41
40-203	1,5	90 S	65	40	A	100	166	257	160	180	100	50	100	70	265	212	15	M12	51
40-201	2	90 L	65	40	A	100	166	282	160	180	100	50	100	70	265	212	15	M12	53
40-265	2	90 L	65	40	A	100	166	282	180	225	100	65	125	95	320	250	15	M12	64
40-263	3	100 L	65	40	A	100	178	306	180	225	100	65	125	95	320	250	15	M12	69
40-261	4	100 L	65	40	A	100	178	306	180	225	100	65	125	95	320	250	15	M12	72
50-165	0,75	80	65	50	A	100	158	234	160	180	100	50	100	70	265	212	15	M12	42
50-163	1	80	65	50	A	100	158	234	160	180	100	50	100	70	265	212	15	M12	43
50-161	1,5	90 S	65	50	A	100	158	257	160	180	100	50	100	70	265	212	15	M12	47
50-203	2	90 L	65	50	A	100	166	282	160	200	100	50	100	70	265	212	15	M12	54
50-201	3	100 L	65	50	A	100	178	306	160	200	100	50	100	70	265	212	15	M12	60
50-263	4	100 L	65	50	A	100	178	306	180	225	100	65	125	95	320	250	15	M12	75
50-261	5,5	112 M	65	50	A	100	178	328	180	225	100	65	125	95	320	250	15	M12	80
50-315	5,5	112 M	80	50	A	125	202	328	225	280	140	65	125	95	345	280	18	M12	89
50-313	7,5	132 S	80	50	A	125	227	369	225	280	140	65	125	95	345	280	18	M12	125
50-311	12,5	132 M	80	50	A	125	227	407	225	280	140	65	125	95	345	280	18	M12	140
65-165	1	80	80	65	A	100	166	234	160	200	100	65	125	95	280	212	15	M12	51
65-163	1,5	90 S	80	65	A	100	166	257	160	200	100	65	125	95	280	212	15	M12	54
65-161	3	100 L	80	65	A	100	178	306	160	200	100	65	125	95	280	212	15	M12	62
65-203	3	100 L	80	65	A	100	178	306	180	225	140	65	125	95	320	250	15	M12	66
65-201	4	100 L	80	65	A	100	178	306	180	225	140	65	125	95	320	250	15	M12	68
65-263	5,5	112 M	80	65	A	100	202	328	200	250	140	80	160	120	360	280	17	M16	98
65-261	7,5	132 S	80	65	A	100	227	369	200	250	140	80	160	120	360	280	17	M16	130
65-313	12,5	132 M	80	65	A	125	227	407	225	280	140	80	160	120	400	315	20	M16	158
65-311	15	160 M	80	65	A	125	259	475	225	280	140	80	160	120	400	315	20	M16	165
80-164	2	90 L	100	80	A	125	166	282	180	225	140	65	125	95	320	250	15	M12	61
80-163	3	100 L	100	80	A	125	178	306	180	225	140	65	125	95	320	250	15	M12	63
80-161	3	100 L	100	80	A	125	178	306	180	225	140	65	125	95	320	250	15	M12	63
80-203	4	100 L	100	80	A	125	202	306	180	250	140	65	125	95	345	280	15	M12	84
80-201	5,5	112 M	100	80	A	125	202	328	180	250	140	65	125	95	345	280	15	M12	90
80-263	7,5	132 S	100	80	A	125	227	369	200	280	140	80	160	120	400	315	17	M16	135
80-261	10	132 M	100	80	A	125	227	407	200	280	140	80	160	120	400	315	17	M16	145
80-313	15	160 M	100	80	A	125	259	475	250	315	140	80	160	120	400	315	20	M16	195
80-311	20	160 L	100	80	A	125	259	519	250	315	140	80	160	120	400	315	20	M16	212
100-205	4	100 L	125	100	A	125	202	306	200	280	140	80	160	120	360	280	17	M16	95
100-203	5,5	112 M	125	100	A	125	202	328	200	280	140	80	160	120	360	280	17	M16	100
100-201	7,5	132 S	125	100	A	125	227	369	200	280	140	80	160	120	360	280	17	M16	132
100-263	12,5	132 M	125	100	A	140	227	407	225	280	140	80	160	120	400	315	17	M16	195
100-261	15	160 M	125	100	A	140	259	475	225	280	140	80	160	120	400	315	17	M16	200
125-265	10	132 M	150	125	A	140	227	407	250	355	140	80	160	120	400	315	17	M16	185
125-263	15	160 M	150	125	A	140	259	475	250	355	140	80	160	120	400	315	17	M16	215
125-261	20	160 L	150	125	A	140	259	519	250	355	140	80	160	120	400	315	17	M16	233


DIMENSIONES DE BRIDAS / FLANGE DIMENSIONS



Disposición 4 agujeros
4 holes position



Disposición 8 agujeros
8 holes position



Disposición 12 agujeros
12 holes position

DN	D	b	k	d4	d2	Tornillos/Screws
32	140	18	100	78	18	4 - M16
40	150	18	110	88	18	4 - M16
50	165	20	125	102	18	4 - M16
65	185	20	145	122	18	4 - M16
80	200	22	160	138	18	8 - M16
100	220	24	180	153	18	8 - M16
125	250	26	210	188	18	8 - M16
150	285	26	240	212	22	8 - M20