

Downlight empotrado modelo ORBIT con sistema cardan multidireccional. Con cuerpo y aros exteriores fabricados en aluminio inyectado y lacados en color blanco o gris metalizado. Para 1 lámpara halógena o de descarga.

ORBIT model recessed downlight with multidirectional cardan system. With body and outer trim rings manufactured in die cast aluminium and lacquered in white or metallised grey. For 1 halogen or discharge lamp.



Fig.1





Fig.2



Downlight ORBIT sistema cardan
ORBIT gimble downlight



Lamp.	Ref	Color	W	Plum	Δ°	Fig.																																																																																																																																																																																																																																																																																			
	92.03.06.0		75	75W	10° - 30°	1																																																																																																																																																																																																																																																																																			

	92.03.07.0		35/70	pag. 465	10° - 40°	1			<table><thead><tr><th></th><th>Max</th><th>Med</th><th>D[m]</th><th>D[m]</th></tr></thead><tbody><tr><td>7000</td><td>4056</td><td>0.76</td><td>0.76</td><td></td></tr><tr><td>1750</td><td>1014</td><td>1.51</td><td>1.51</td><td></td></tr><tr><td>778</td><td>451</td><td>2.27</td><td>2.27</td><td></td></tr><tr><td>437</td><td>254</td><td>3.03</td><td>3.03</td><td></td></tr><tr><td>280</td><td>162</td><td>3.79</td><td>3.79</td><td></td></tr></tbody></table>		Max	Med	D[m]	D[m]	7000	4056	0.76	0.76		1750	1014	1.51	1.51		778	451	2.27	2.27		437	254	3.03	3.03		280	162	3.79	3.79	
		Max	Med	D[m]	D[m]																																		
7000	4056	0.76	0.76																																				
1750	1014	1.51	1.51																																				
778	451	2.27	2.27																																				
437	254	3.03	3.03																																				
280	162	3.79	3.79																																				
92.03.07.3		35/70	pag. 465	10° - 40°	1																																		
CLASE I																																							

Im = 4005.00
Imax = 1147.98 cd/lim

F.U.T.E 1.00 A
Eta = 99.99%

G=0.0°
Alpha=20.7° +20.7°


GX 8.5 COMBI111	92.03.03.0		35/70	pag. 465	10° - 40°	1	9203030 Semiplanes C 	Max Med D[m] D[m] <table><tr><td>1</td><td>7074</td><td>4401</td><td>0.38</td><td>0.38</td></tr><tr><td>2</td><td>1769</td><td>1100</td><td>0.75</td><td>0.75</td></tr><tr><td>3</td><td>786</td><td>489</td><td>1.13</td><td>1.13</td></tr><tr><td>4</td><td>442</td><td>275</td><td>1.51</td><td>1.51</td></tr><tr><td>5</td><td>263</td><td>176</td><td>1.88</td><td>1.88</td></tr></table>	1	7074	4401	0.38	0.38	2	1769	1100	0.75	0.75	3	786	489	1.13	1.13	4	442	275	1.51	1.51	5	263	176	1.88	1.88
	1	7074	4401	0.38	0.38																												
2	1769	1100	0.75	0.75																													
3	786	489	1.13	1.13																													
4	442	275	1.51	1.51																													
5	263	176	1.88	1.88																													
92.03.03.3		35/70	pag. 465	10° - 40°	1																												
CLASE I																																	
																																	

Im = 135/00
Imax = 5/40/27 °/


	92.03.05.0		1x max. 100	pag. 465	8° - 45°	2																																																																																																					
--	------------	--	-------------	----------	----------	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Downlight ORBIT sistema cardan LEDS
ORBIT gimble downlight LEDS

Lamp.	Ref	Color	W	Plum	Cd.	Δ°	Fig.	
LED 6500°K III 700 mA	92.01.48.0	☐	16	pag. 465	2400	26°	2	9201480 Semiplanes C
	92.01.48.3	☐	16	pag. 465	2400	26°	2	

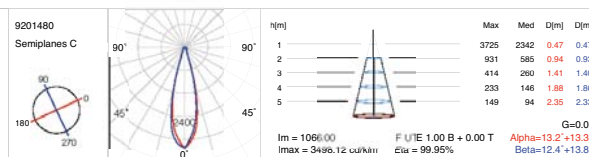

LED 6500°K III 700 mA	92.01.49.0	☐	16	pag. 465	10380	13°	2	9201490 Semiplanes C
	92.01.49.3	☐	16	pag. 465	10380	13°	2	

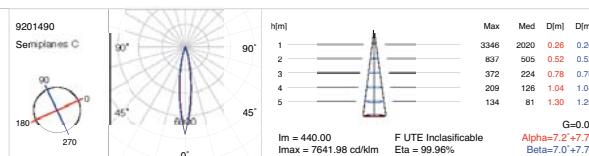

Equipos página 465
Control Gear 465

