


Bombas Radiales 4" Salida 1 1/4" Serie BR 3

4" Radial Flow Pumps
1 1/4" Outlet


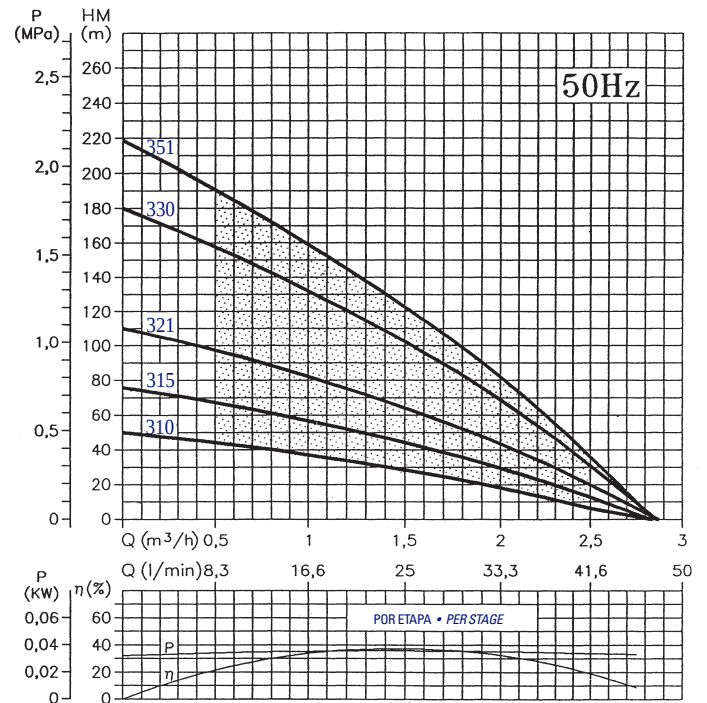


Datos técnicos / Technical data

TIPO TYPE	MOTOR		IN		CONDENS. CAPACITOR mF	m³/h l/min	0	0,5	1	1,5	2	2,5
	Kw	CV	1~220V A	3~380V A			0	8,3	16,6	25	33,3	41,6
BR 310	0,37	0,5	3,3	1,3	16	ALTURA MANOMÉTRICA TOTAL HEAD (m)	48	45	36	28	20	8
BR 315	0,55	0,75	4,5	1,7	20		77	68	58	45	30	13
BR 321	0,75	1,0	5,6	2,2	30		110	100	80	63	43	20
BR 330	1,1	1,5	8,2	3,2	40		180	160	130	100	65	30
BR 351	1,5	2,0	10,4	4	50		220	190	160	120	80	37

Bombas Radiales 4" Salida 1 1/4" Serie BR 16

4" Radial Flow Pumps
1 1/4" Outlet

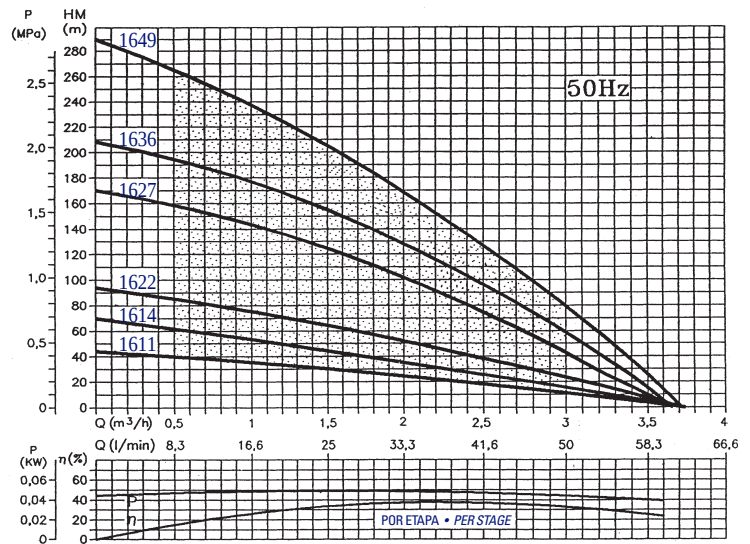


Datos técnicos / Technical data

TIPO TYPE	MOTOR		IN		CONDENS. CAPACITOR mF	m³/h l/min	0	0,5	1	1,5	2	2,5	3
	Kw	CV	1~220V A	3~380V A			0	8,3	16,6	25	33,3	41,6	50
BR 1611	0,37	0,5	3,3	1,3	16	ALTURA MANOMÉTRICA TOTAL HEAD (m)	43	40	35	30	25	18	10
BR 1614	0,55	0,75	4,5	1,7	20		70	62	55	48	35	25	15
BR 1622	0,75	1,0	5,6	2,2	30		95	85	75	65	50	40	25
BR 1627	1,1	1,5	8,2	3,2	40		170	158	142	122	100	75	40
BR 1636	1,5	2,0	10,4	4	50		210	195	178	155	130	95	60
BR 1649	2,2	3,0	—	5,9	—		290	265	235	205	170	128	80

Bombas Radiales 4" Salida 1 1/4" Serie BR 5

4" Radial Flow Pumps
1 1/4" Outlet

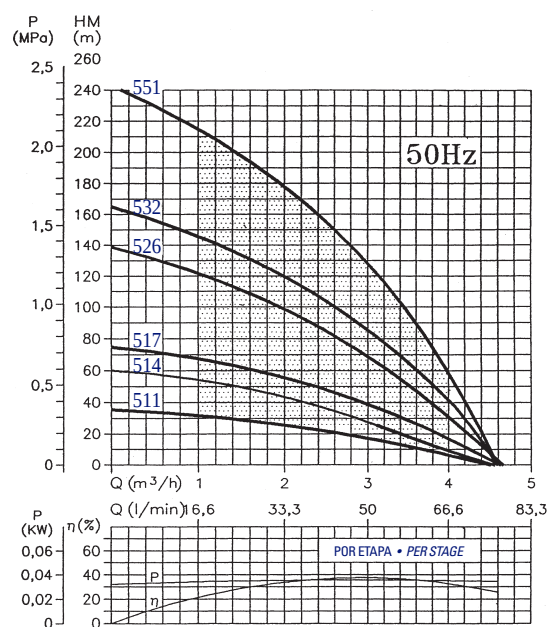


Datos técnicos / Technical data

TIPO TYPE	MOTOR		IN		CONDENS. CAPACITOR mF	m³/h l/min	0	1	1,5	2	2,5	3	3,5	4
	Kw	CV	1~220V A	3~380V A			0	16,6	25	33,3	41,6	50	58,3	66,6
BR 511	0,37	0,5	3,3	1,3	16	ALTURA MANOMÉTRICA TOTAL HEAD (m)	36	31	29	26	23	18	13	5
BR 514	0,55	0,75	4,5	1,7	20		60	53	50	42	38	30	18	8
BR 517	0,75	1,0	5,6	2,2	30		76	67	60	55	50	40	30	18
BR 526	1,1	1,5	8,2	3,2	40		140	123	110	100	85	70	50	30
BR 532	1,5	2,0	10,4	4	50		165	148	137	120	105	85	62	40
BR 551	2,2	3,0	—	5,9	—		250	215	210	180	155	130	95	60

Bombas Radiales 4" Salida 1 1/4" Serie BR 4

4" Radial Flow Pumps
1 1/4" Outlet

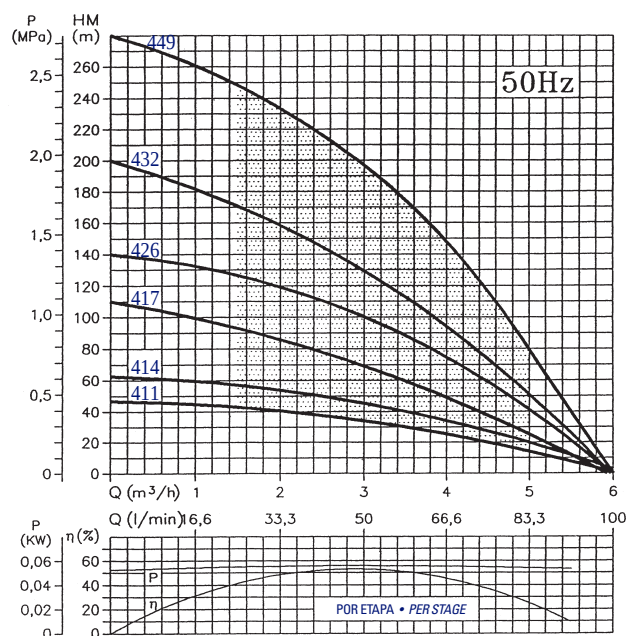


Datos técnicos / Technical data

TIPO TYPE	MOTOR		IN		CONDENS. CAPACITOR mF	m³/h l/min	0	1,5	2	2,5	3	3,5	4	5
	Kw	CV	1~220V A	3~380V A			0	25	33,3	41,6	50	58,3	66,6	83,3
BR 411	0,55	0,75	4,5	1,7	20	ALTURA MANOMÉTRICA TOTAL HEAD (m)	47	44	40	38	35	30	25	15
BR 414	0,75	1,0	5,6	2,2	30		63	58	54	50	45	40	35	20
BR 417	1,1	1,5	8,2	3,2	40		110	92	85	80	70	60	50	25
BR 426	1,5	2,0	10,4	4	50		140	128	120	110	100	88	75	40
BR 432	2,2	3,0	—	5,9	—		200	170	150	145	130	113	95	50
BR 449	3,0	4,0	—	7,8	—		280	249	235	215	196	175	150	80

Bombas Radiales 4" Salida 1 1/4" Serie BR 12

4" Radial Flow Pumps
1 1/4" Outlet


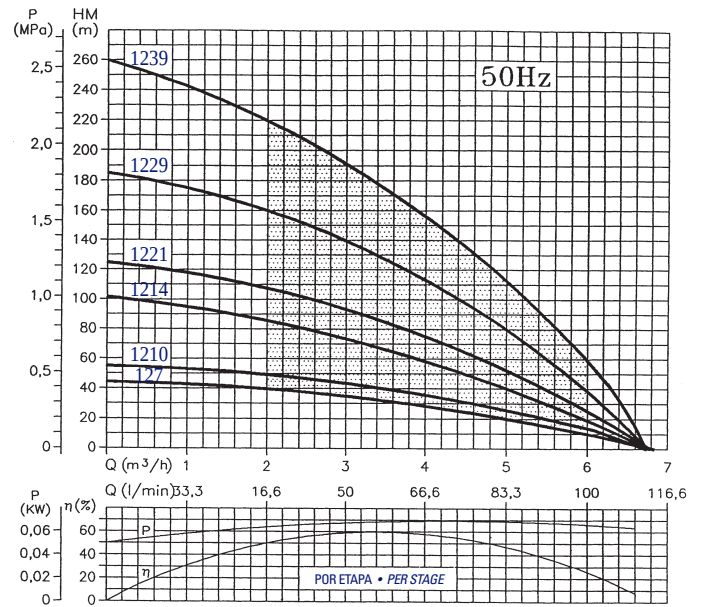


Datos técnicos / Technical data

TIPO TYPE	MOTOR		IN		CONDENS. CAPACITOR mF	m ³ /h l/min	0	2	2,5	3	3,5	4	4,5	5	6
	Kw	HP	1~220V A	3~380V A			0	33,3	41,6	50	58,3	66,6	75	83,3	100
BR 127	0,55	0,75	4,5	1,7	20	ALTURA MANOMÉTRICA TOTAL HEAD (m)	45	40	36	34	30	28	25	20	10
BR 1210	0,75	1,0	5,6	2,2	30		55	50	48	45	40	35	30	27	15
BR 1214	1,1	1,5	8,2	3,2	40		102	85	80	72	65	57	50	40	20
BR 1221	1,5	2,0	10,4	4	50		125	108	100	95	85	75	65	53	27
BR 1229	2,2	3,0	—	5,9	—		185	160	150	140	125	110	95	80	40
BR 1239	3,0	4,0	—	7,8	—		260	220	205	190	175	155	135	112	60

Bombas Radiales 4" Salida 2" Serie BR 2

4" Radial Flow Pumps
2" Outlet

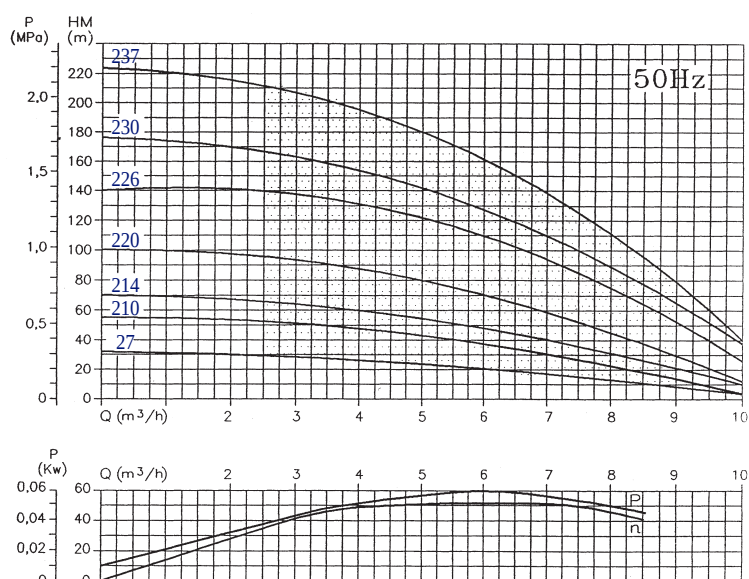



Datos técnicos / Technical data

TIPO TYPE	MOTOR		IN		CONDENS. CAPACITOR mF	m³/h l/min	0	2,5	3	4	5	6	7	8	9	10
	Kw	HP	1~220V A	3~380V A			0	41,6	50	66,6	83,3	100	116,6	133,3	150	100
BR 27	0,75	1,0	5,6	2,2	30	ALTURA MANOMÉTRICA TOTAL HEAD (m)	32	29	28	26	24	22	17	13	8	—
BR 210	1,1	1,5	8,2	3,2	40		55	52	50	48	42	38	30	24	17	5
BR 214	1,5	2,0	10,4	4	50		70	66	64	63	56	47	38	29	15	10
BR 220	2,2	3,0	—	5,9	—		100	96	94	90	80	70	55	42	28	12
BR 226	3,0	4,0	—	7,8	—		140	135	130	125	122	97	74	60	40	25
BR 230	4,0	5,5	—	10	—		175	170	160	145	142	120	94	80	50	38
BR 237	5,5	7,5	—	13,7	—		225	218	210	200	182	158	123	100	70	40

Bombas Radiales 4" Salida 2" Serie BR 9

4" Radial Flow Pumps
2" Outlet


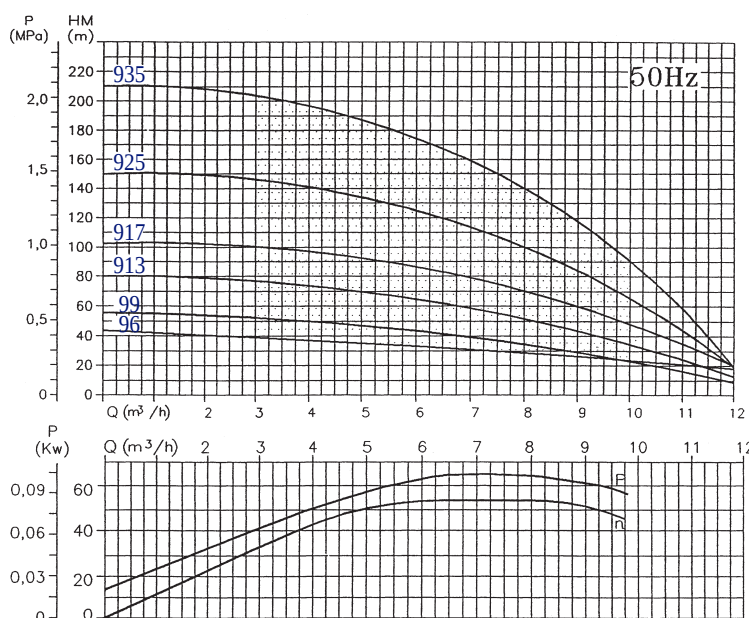



Datos técnicos / Technical data

TIPO TYPE	MOTOR		IN		CONDENS. CAPACITOR mF	m³/h l/min	0	3	4	5	6	7	8	9	10
	Kw	HP	1~220V A	3~380V A			0	50	66,6	83,3	100	116,6	133,3	150	100
BR 96	1,1	1,5	8,2	3,2	40	ALTURA MANOMÉTRICA TOTAL HEAD (m)	43	38	36	35	33	30	27	23	18
BR 99	1,5	2,0	10,4	4	50		55	53	50	47	45	40	34	28	22
BR 913	2,2	3,0	—	5,9	—		80	76	74	70	66	58	50	42	34
BR 917	3,0	4,0	—	7,8	—		102	101	100	93	88	75	68	57	48
BR 925	4,0	5,5	—	10	—		150	145	142	134	125	102	98	84	65
BR 935	5,5	7,5	—	13,7	—		210	205	200	188	172	150	138	115	90

Bombas Radiales 4" Salida 2" Serie BR 6

4" Radial Flow Pumps
2" Outlet

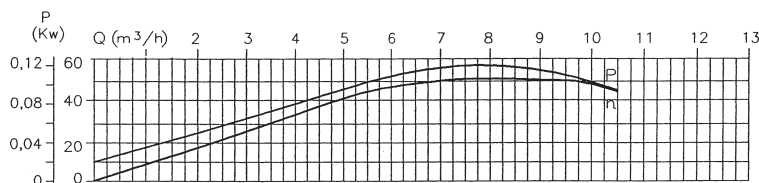
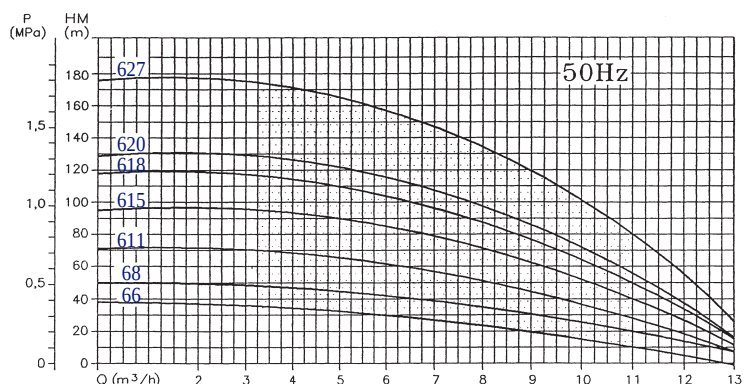



Datos técnicos / Technical data

TIPO TYPE	MOTOR		IN		CONDENS. CAPACITOR mF	m³/h l/min	0	3	4	5	6	7	8	9	10	11
	Kw	HP	1~220V A	3~380V A			0	50	66,6	83,3	100	116,6	133,3	150	166,6	183,3
BR 66	1,1	1,5	8,2	3,2	40	ALTURA MANOMÉTRICA TOTAL HEAD (m)	37	35	33	32	31	29	27	23	20	15
BR 68	1,5	2,0	10,4	4	50		50	48	46	44	43	38	35	32	27	20
BR 611	2,2	3,0	—	5,9	—		71	69	67	66	64	58	52	39	36	28
BR 615	3,0	4,0	—	7,8	—		95	94	92	90	88	77	68	60	52	40
BR 618	3,7	5,0	—	9,1	—		118	116	112	110	108	96	88	78	64	50
BR 620	4,0	5,5	—	10	—		128	126	125	121	112	103	90	79	70	55
BR 627	5,5	7,5	—	13,7	—		175	170	168	165	162	150	135	120	100	80

Bombas Radiales 4" Salida 2" Serie BR 15

4" Radial Flow Pumps
2" Outlet

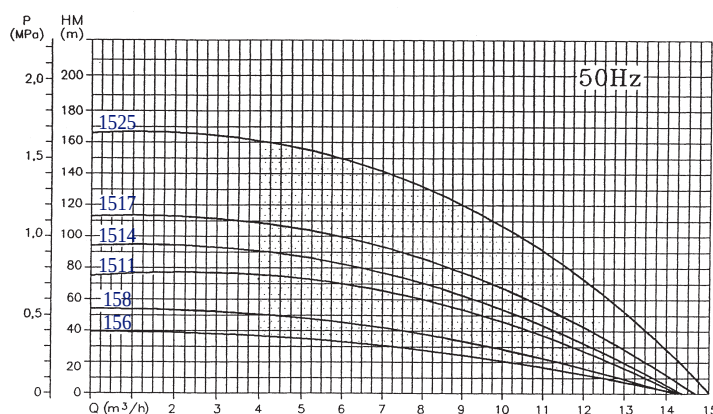



Datos técnicos / Technical data

TIPO TYPE	MOTOR		IN		CONDENS. CAPACITOR mF	m³/h l/min	0	4	5	6	7	8	9	10	11	12
	Kw	HP	1~220V A	3~380V A			0	66,6	83,3	100	116,6	133,3	150	166,6	183,3	200
BR 156	1,5	2,0	10,4	4	50	ALTURA MANOMÉTRICA TOTAL HEAD (m)	40	37	35	34	32	30	26	23	18	13
BR 158	2,2	3,0	—	5,9	—		55	52	50	48	44	41	37	32	25	20
BR 1511	3,0	4,0	—	7,8	—		75	74	72	70	65	60	55	48	42	28
BR 1514	3,7	5,0	—	9,1	—		93	89	85	83	78	70	60	50	46	30
BR 1517	4,0	5,5	—	10	—		112	110	105	102	94	86	78	67	58	50
BR 1525	5,5	7,5	—	13,7	—		165	162	157	152	140	130	115	90	80	62

Bombas Radiales 4" Salida 2" Serie BR 7

4" Radial Flow Pumps
2" Outlet

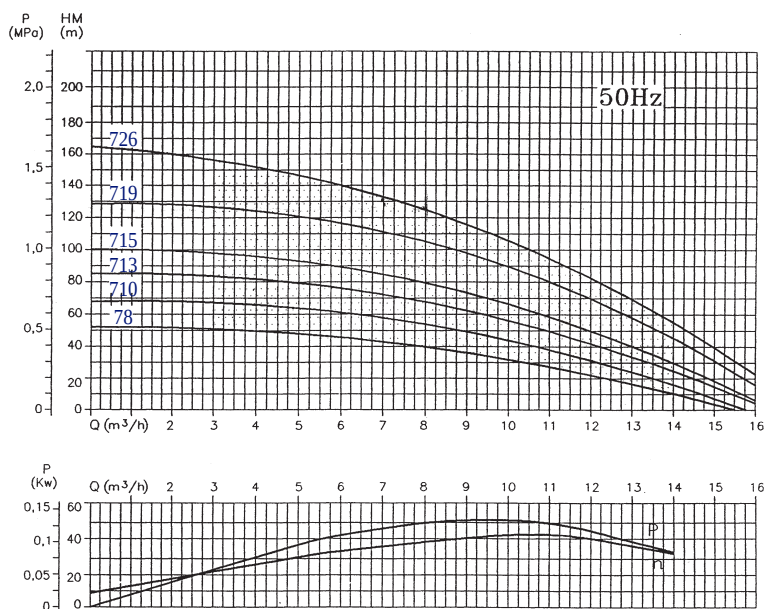



Datos técnicos / Technical data

TIPO TYPE	MOTOR		IN 3~380V A	m³/h l/min	0	4	5	6	7	8	9	10	11	12	13	14
	Kw	HP			0	66,6	83,3	100	116,6	133,3	150	166,6	183,3	200	216,6	233,3
BR 78	2,2	3,0	5,9	ALTURA MANOMÉTRICA TOTAL HEAD (m)	53	49	48	47	43	40	37	32	27	23	18	10
BR 710	3,0	4,0	7,8		67	64	62	60	57	53	47	42	35	30	23	15
BR 713	3,7	5,0	9,1		86	82	80	78	72	69	64	60	52	45	38	25
BR 715	4,0	5,5	10		100	95	93	90	85	80	72	68	60	50	40	30
BR 719	5,5	7,5	13,7		127	120	118	113	110	105	100	90	80	70	60	45
BR 726	7,5	10,0	17,8		164	154	148	142	138	125	120	113	90	80	65	55

Bombas Semi axiales 4" Salida 2" Serie BR 8

4" Mixed Flow Pumps

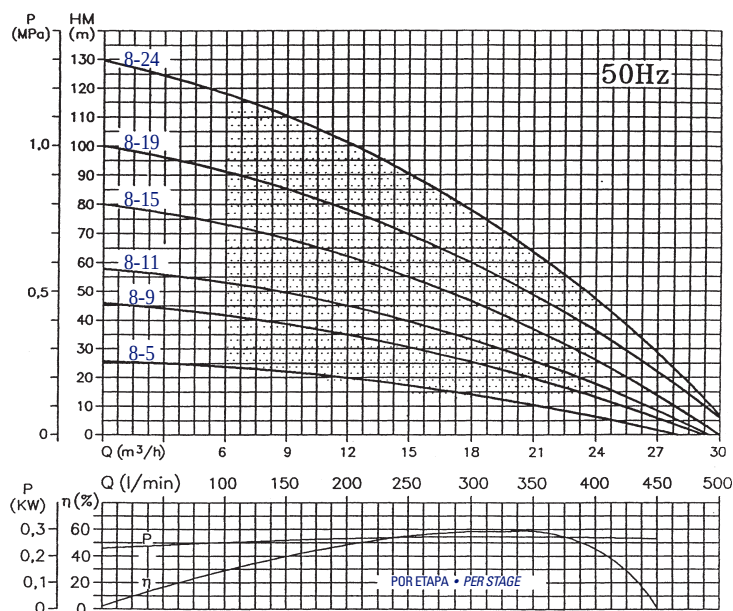

Datos técnicos / Technical data

TIPO TYPE	MOTOR		IN		CONDENS. CAPACITOR mF	m³/h l/min	0	6	9	12	15	18	21	24	25
	Kw	HP	1~220V A	3~380V A			0	100	150	200	250	300	350	400	416,6
BR 8-5	1,5	2,0	10,4	4	50	ALTURA MANOMÉTRICA TOTAL HEAD (m)	26	24	22	20	17	15	12	8	7
BR 8-9	2,2	3,0	—	5,9	—		46	42	38	35	30	25	18	13	10
BR 8-11	3,0	4,0	—	7,8	—		58	54	50	45	38	32	25	18	15
BR 8-15	4,0	5,5	—	10	—		80	76	69	62	54	46	36	26	21
BR 8-19	5,5	7,5	—	13,7	—		100	93	87	78	69	59	49	36	30
BR 8-24	7,5	10,0	—	17,8	—		130	120	112	101	88	77	63	47	40