
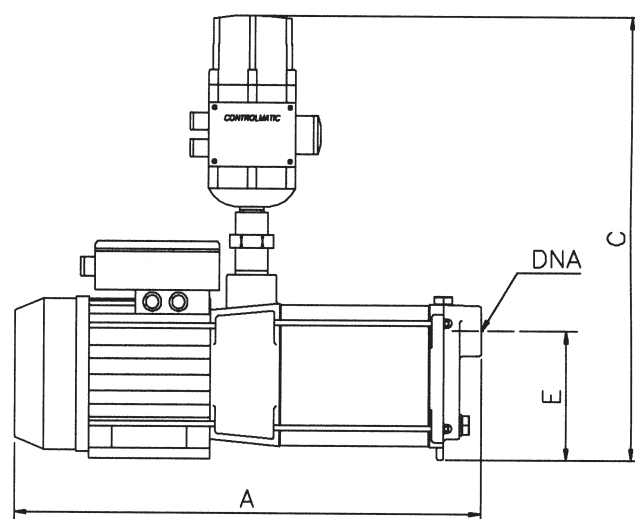


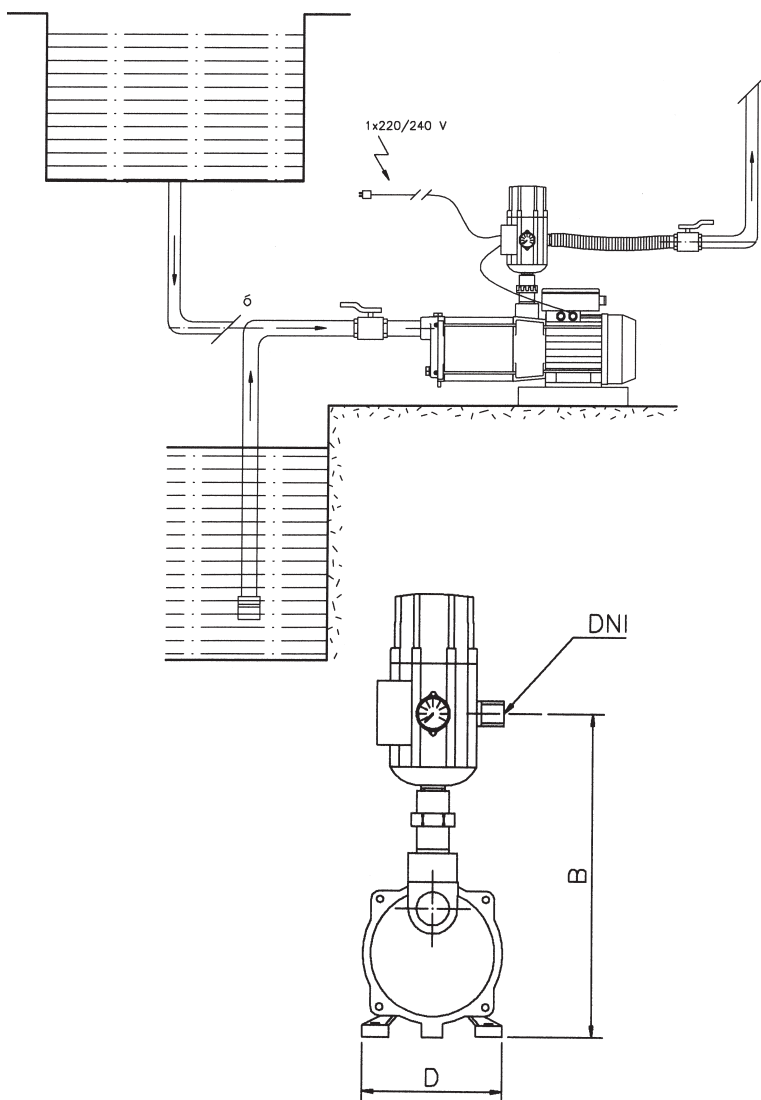

CARACTERÍSTICAS TÉCNICAS GRUPOS DE PRESIÓN CONSTANTE -GPC- TECHNICAL CHARACTERISTICS OF GPC CONSTANT PRESSURE SETS

TIPO TYPE	Dimensiones / Dimensions					DNA	DNI	Caudal l/h Flow l/h. Max. a 20m.c.a.	Potencia Total Total power		Arranque Amp x bomba Amp. start-up x pump D	Altura m.c.a. max. Height (mts)
	A	B	C	D	E				CV	KW		
GP NIN-10	397	290	410	128	91	1"	1"	1875	0,5	0,37	2,9	30
GP NIN-20	440	290	410	128	91	1"	1"	2250	0,8	0,56	3,1	40
GP MAXI-30	367	322	442	138	112	1"	1"	4500	0,8	0,56	5	40
GP MAXI-40	391	322	442	138	112	1"	1"	5000	1	0,75	6,2	50
GP MAXI-50	413	322	442	138	112	1"	1"	5200	1,2	0,9	6,9	60
GP MAXOR-30	367	322	442	138	112	1"	1"	4000	0,8	0,56	5	40
GP MAXOR-40	391	322	442	138	112	1"	1"	4400	1	0,75	6,2	50
GP MAXOR-50	413	322	442	138	112	1"	1"	4600	1,2	0,9	6,9	60
GP MAR-3	393	330	450	138	112	1"	1"	4000	0,8	0,56	5	40
GP MAR-4	416	330	450	138	112	1"	1"	4400	1	0,75	6,2	50
GP MAR-5	440	330	450	138	112	1"	1"	4600	1,2	0,9	6,9	60
GP MILLENIUM-3	407	330	450	138	112	1"	1"	7000	1,2	0,9	6,9	40
GP MILLENIUM-4	480	339	459	168	121	1"	1"	7400	1,5	1,1	8,5	55
GP MILLENIUM-5	508	339	459	168	121	1"	1"	7600	2	1,5	9,2	65
GP MILEPLUS-30	414	330	450	138	110	1 1/4"	1"	7100	1,25	0,92	6,9	40
GP MILEPLUS-40	487	339	459	168	119	1 1/4"	1"	8300	1,5	1,1	8,5	55
GP RUBI-60	335	322	442	138	71	1"	1"	4000	0,8	0,56	5	40
GP RUBI-90	358	322	442	138	71	1"	1"	4400	1	0,75	6,2	50
GP POLAR-65	350	322	442	138	102	1"	1"	4000	0,8	0,56	5	40
GP POLAR-95	373	322	442	138	102	1"	1"	4400	1	0,75	6,2	50

Otras opciones: Grupos con diversas bombas de nuestro catálogo. Other Options: Sets with different pumps from our catalogue.